


MLX PL TORINO LED PANELEK



HL0019870
HL0019965
HL0019814
HL0019966
HL0019960
HL0019967
HL0019815
HL0019968
HL0019869
HL0019964




Aluminum Frame




SMD 2835







MLX PL TORINO LED PANELEK



Méreték

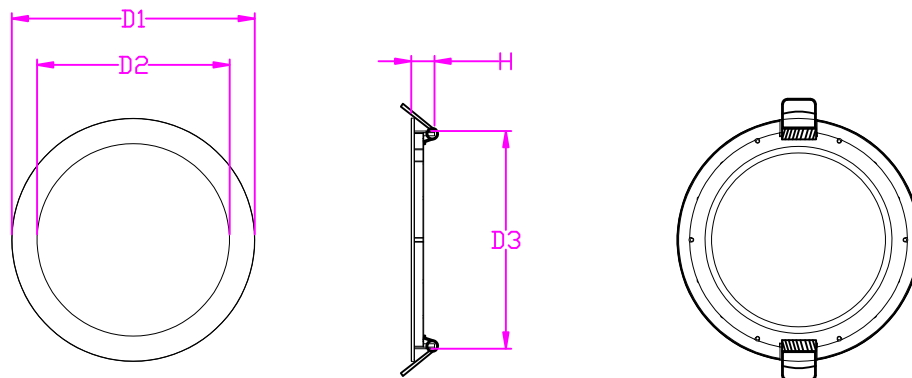


		D1	D2	D3	H	Kivágási méret
HL0019869	3W	Φ83mm	Φ45mm	Φ66.5mm	14mm	Φ75mm
HL0019870	6W	Φ120mm	Φ81mm	Φ103mm	14mm	Φ105mm
HL0019814	12W	Φ170mm	Φ128mm	Φ150mm	14mm	Φ155mm
HL0019960	18W	Φ220mm	Φ177mm	Φ200mm	14mm	Φ210mm
HL0019815	24W	Φ294mm	Φ250mm	Φ274mm	14mm	Φ285mm

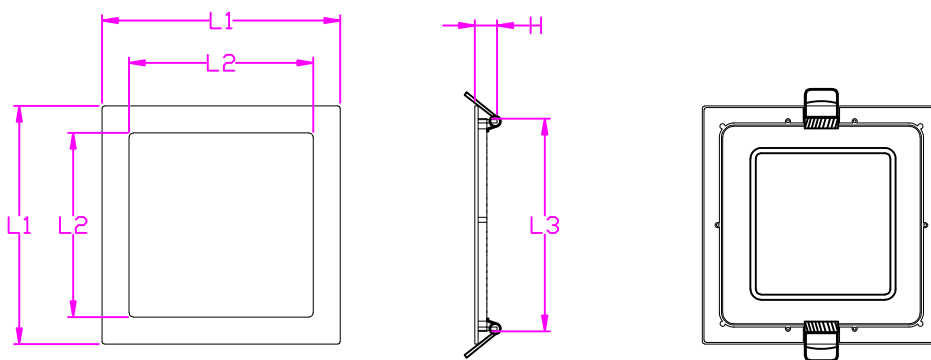


		L1	L2	L3	H	Kivágási méret
HL0019964	3W	84x84mm	48x48mm	69.5x69.5mm	14mm	75x75mm
HL0019965	6W	120x120mm	76x76mm	101x101mm	16.5mm	105x105mm
HL0019966	12W	170x170mm	126x126mm	149x149mm	14mm	155x155mm
HL0019967	18W	220x220mm	177x177mm	201x201mm	14mm	210x210mm
HL0019968	24W	292x292mm	248x248mm	271x271mm	14mm	285x285mm






MLX PL TORINO LED PANELEK




CIKKSZÁM	HL0019869	HL0019870	HL0019814	HL0019960	HL0019815
Norminal Wattage	3W	6W	12W	18W	24W
LED Qty	15 PCS	30 PCS	60 PCS	96 PCS	120 PCS
Input Voltage	AC200-240V 50/60Hz				
Luminaires Class	ClassIII				
LED Type	2835 SMD				
Driver Type	Flicker Free				
Operating Temperature	-20°C to +50°C				
Power Factor(PF)	≥0.5				
THD	<20%				
Lumen Output (+/- 5%)	255 lm	510 lm	1020 lm	1530 lm	2040 lm
Luminaire efficacy (+/- 5%)	85LM/W	85LM/W	85LM/W	85LM/W	85LM/W
Beam Angle	120°				
CRI	≥80 Ra				
CCT	3000K (Warm White), 4000K (Nature White), 6000K (Cool White)				
Rating	IP41				
Material	Die-cast aluminum + PS				
Optional dimming type	Triac dimming/1-10V dimming /DALI dimming				
Fixing Ways	In-built				
Operating Voltage/Current	DC9V/270mA	DC18V/270mA	DC36V/300mA	DC36V/420mA	DC36V/560mA
Product Size(mm)	Φ83*H14mm	Φ120*H14mm	Φ170*H14mm	Φ220*H14mm	Φ294*H14mm
Packaging Type	1*40layer=40PCS/carton	1*20layer=20PCS/carton	1*20layer=20PCS/carton	1*20layer=20PCS/carton	1*20layer=20PCS/carton
Packaging size(mm)	L385*W300*H155	L300*W260*H175	L370*W300*H220	L465*W300*H270	L625*W300*H340
N.W.	0.085KG/PCS	0.1KG/PCS	0.185KG/PCS	0.3KG/PCS	0.5KG/PCS
G.W.	4.4KG/ Carton	3.1KG/ Carton	4.7KG/ Carton	7.1KG/ Carton	11KG/ Carton
Life Time	> 49999 hours				
Certifications	CE、RoHS				






MLX PL TORINO LED PANELEK



CIKKSZÁM	HL0019964	HL0019965	HL0019966	HL0019967	HL0019968
Norminal Wattage	3W	6W	12W	18W	24W
LED Qty	15 PCS	30 PCS	60 PCS	96 PCS	120 PCS
Input Voltage	AC200-240V 50/60Hz				
Luminaires Class	ClassIII				
LED Type	2835 SMD				
Driver Type	Flicker Free				
Operating Temperature	-20°C to +50°C				
Power Factor(PF)	≥0.5				
THD	<20%				
Lumen Output (+/- 5%)	255 lm	510 lm	1020 lm	1530 lm	2040 lm
Luminaire efficacy (+/- 5%)	85LM/W	85LM/W	85LM/W	85LM/W	85LM/W
Beam Angle	120°				
CRI	≥80 Ra				
CCT	3000K (Warm White), 4000K (Nature White), 6000K (Cool White)				
Rating	IP41				
Material	Die-cast aluminum + PS				
Optional dimming type	Triac dimming/1-10V dimming /DALI dimming				
Fixing Ways	In-built				
Operating Voltage/Current	DC9V/270mA	DC18V/270mA	DC36V/300mA	DC36V/420mA	DC36V/560mA
Product Size(mm)	84*84*H14mm	120*120*H16,5mm	170*170*H14mm	220*220*H14mm	292*292*H14mm
Packaging Type	1*40layer=40PCS/carton	1*20layer=20PCS/carton	1*20layer=20PCS/carton	1*20layer=20PCS/carton	1*20layer=20PCS/carton
Packaging size(mm)	L385*W300*H155	L300*W260*H195	L370*W300*H240	L465*W300*H290	L625*W340*H350
N.W.	0.085KG/PCS	0.125KG/PCS	0.225KG/PCS	0.365KG/PCS	0.6KG/PCS
G.W.	4.4KG/ Carton	3.5KG/ Carton	5.5KG/ Carton	8.3KG/ Carton	13.2KG/ Carton
Life Time	> 49999 hours				
Certifications	CE、RoHS				





MLX PL TORINO LED PANELEK

200-240V
AC

FÖLDELES

IP
4I

3 ÉV
GARANCIA

50 000 h



FLICKER
FREE

120°


-20
+50
°C

CRI>80


SRPL225-18W

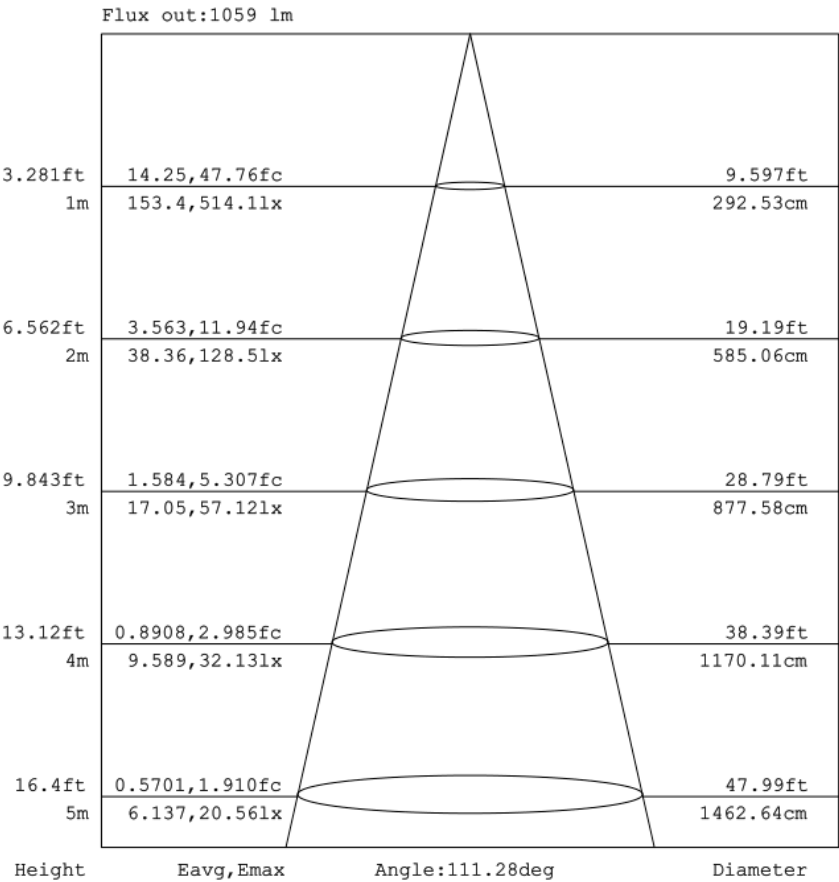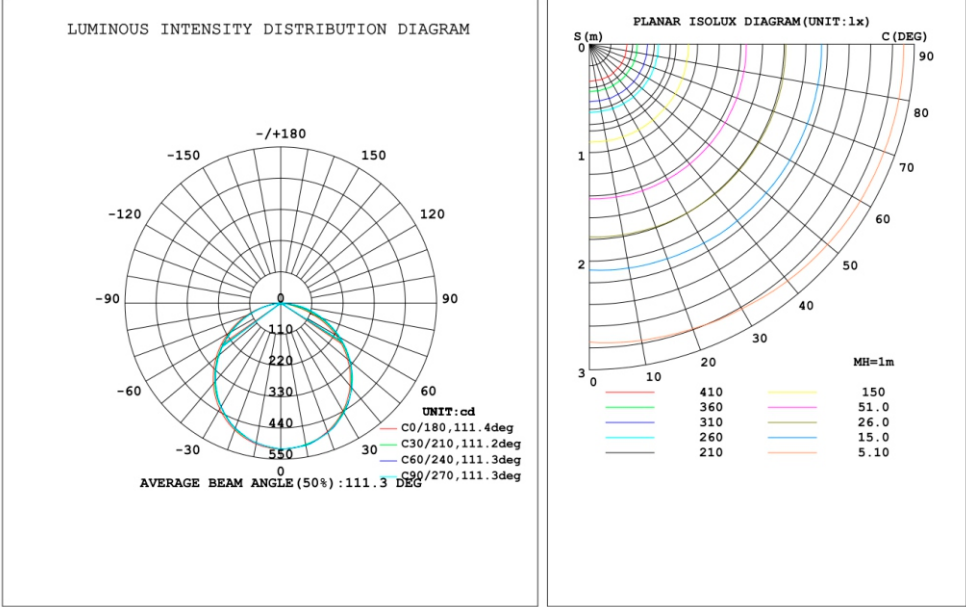


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



MLX PL TORINO LED PANELEK




Szerelési útmutató

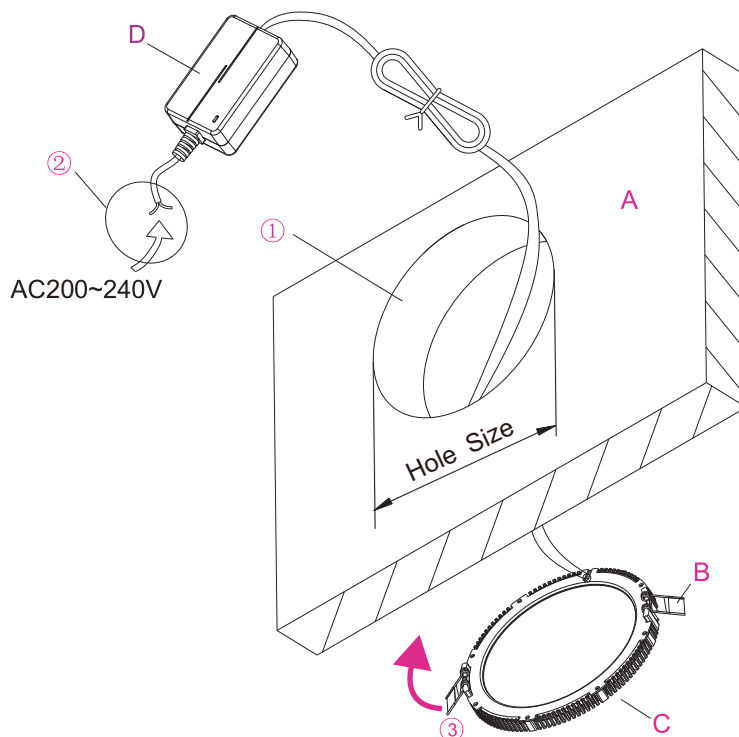


1. vágja ki a lyukat
2. csatlakoztassa a kábelt
3. nyomja be a B jelű rugót
4. tegye a lámpatestet a helyére





MLX PL TORINO LED PANELEK



Méreték




1db




3W	40 db/karton
6W	20 db/karton
12W	20 db/karton
18W	20 db/karton
24W	20 db/karton





MLX PL TORINO LED PANELEK



Jellemzők

Kiváló minőségű, nagy fényerejű LED fényforrásként, nagy hatékonyságú és energiatakarékos, tükröződés- és villódzásmentes, (FLICKER FREE) átlagos világító felülettel rendelkezik.

Alumínium hűtőbordával ellátott, tükröződés mentes

Több mint 90%-os fényáteresztő képességű lámpaernyő anyagok, a lámpatest pedig nagy hővezető képességű alumíniumötvözet.

Bemeneti feszültség: AC200-240V.

Új, nagy hatékonyságú meghajtó.

Azonnali indítás, nincs villogás, nincs zúgás.

Speciális áramköri kialakítás, hatékonyabban és egyenletesebben világít.

Zöld környezetvédelem, ólommentes anyag, megfelel az ROHS-nek.

Nincs RF interferencia.

Alkalmazási terület:

Hotelek

Irodák

Üzletek, plázák

Iskolák, kollégiumok

Intézmények

Kórházak

Ipari létesítmények

