



MLX SL STREET-A LED UTCAFEJ LÁMPÁK




HL0019975

30W



Front

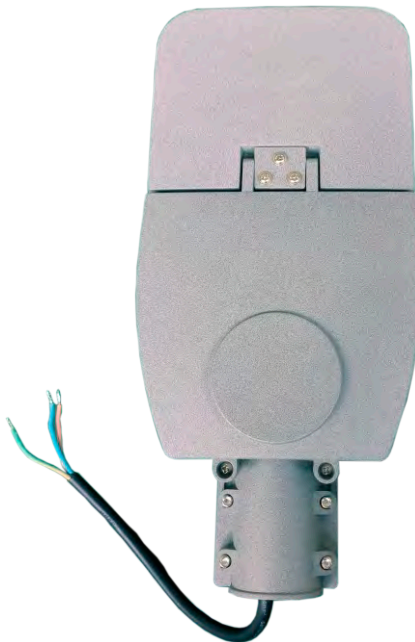

Back



Side



MLX SL STREET-A LED UTCAFEJ LÁMPÁK



HL0019975



- Fényvezérlő (opcionális)
- 1-10V fényerőszabályozás (opcionális)
- Villámvédelem
- Lumileds/Philips Leds/Sanan Leds
- OSRAM LED meghajtó
- A rendszer hatásfoka akár 150~170LM/W
- Túlfeszültség-védelem - SPD szint 15KV/20KV.

FÉNYVEZÉRLŐ (opcionális)



OSRAM LED Driver Inside



16Lux - bekapcsol
25Lux - kikapcsol

Villámlevezető





MLX SL STREET-A LED UTCAFEJ LÁMPÁK



① Wiring, as shown in Figure 1.

AC input: L (brown or red)- firewire, N (blue or black)- neutral,(yellow-green)-ground line;

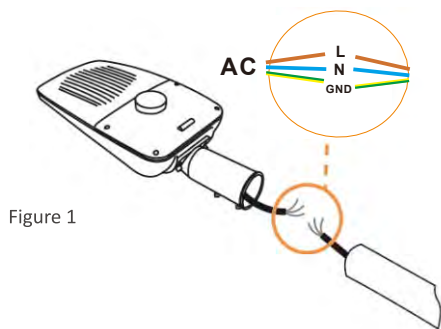


Figure 1

② Install the pole, as shown in Figure 2.

Put the pole into the lamp arm and fix the screw with a hex wrench. Be careful not to lock it;

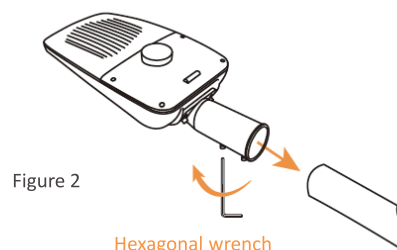


Figure 2

③ Adjust the angle as shown in Figure 3.

3. Adjust the lamp body horizontally to make the lamp body and the ground Vertically, tighten the screws with a hex wrench;




Figure 3

④ Install the Photocontrol, as shown in Figure 4.

Place the photocontrol on the lamp body and lock it;




Figure 4

⑤ Assembly is completed, as shown in Figure 5.






Figure 5

if with light controller

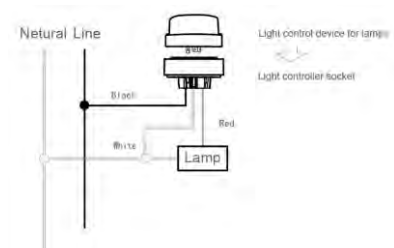

Dimensions(Unit:mm)


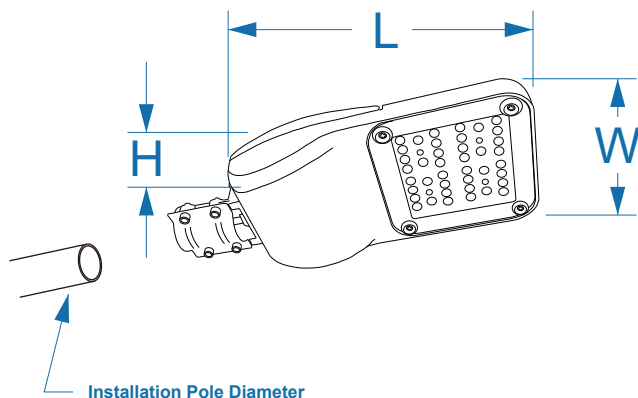


Model	Power	Product Size	Installation Pole Diameter
SRSLO30W-230V	30W	L260xW150xH65mm	Φ40mm





MLX SL STREET-A LED UTCAFEJ LÁMPÁK

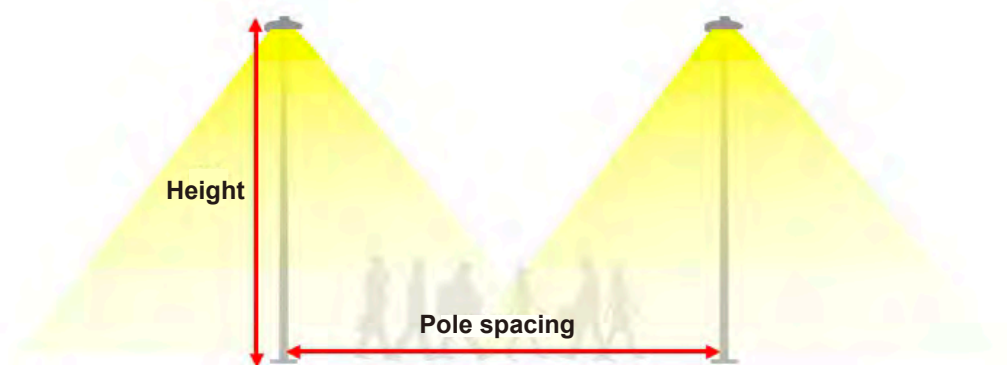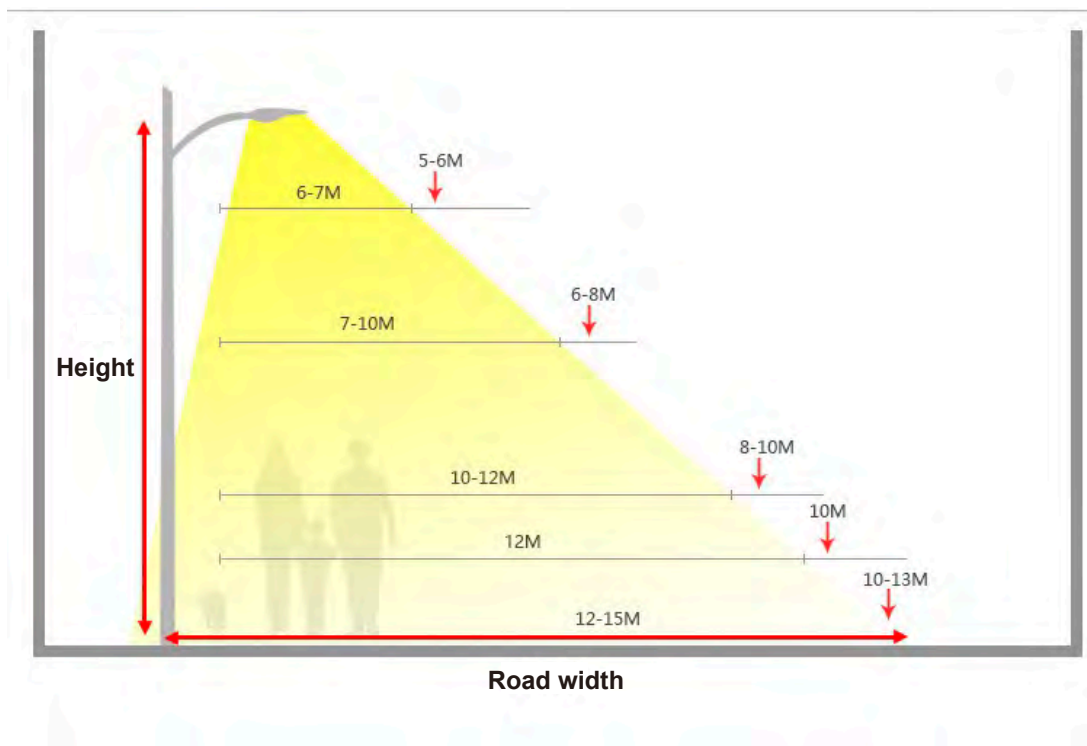

No.	Height of pole	Pole spacing	Road width	LED street lamp power
1	3-5M	5-10M	3-6M	30W
2	5-6M	5-20M	6-7M	60W
3	6-8M	18-24M	7-10M	100W
4	8-10M	24-30M	10-12M	150W
5	10-13M	30-39M	12-15M	200W





MLX SL STREET-A LED UTCAFEJ LÁMPÁK



Driver brands: ZHIHE

Optional LED brands: Lumileds/ Philips Leds/ Sanan Leds




Product	SRSL030W-230V		
Norminal Wattage	30W		
LED Qty	40 PCS		
Input Voltage	AC220-240V 50/60Hz		
Luminaires Class	Class I		
LED Brand	Lumileds/ Philips Leds/ Sanan Leds 2835SMD/3030SMD		
Driver Brand	ZHIHE		
Operating Temperature	-20℃to+50℃		
Power Factor(PF)	≥0. 95		
THD	<20%		
CCT	3000K (Warm White)	4000K (Nature White)	6000K (Cool White)
Lumen Output (+/- 5%)	3900lm±10%	4500lm±10%	4500lm±10%
Luminaire efficacy (+/- 5%)	130LM/W±10%	150LM/W±10%	150LM/W±10%
Beam Angle	135° x70°		
CRI	≥70 Ra		
Rating	IP65		
Material	Die-cast aluminum + optical glass		
Suit for Light pole	Φ40		
Shell Color	Gray other RAL colors available on request		
Accessories (Optional)	Common		Light controller
Product Size(mm)	L260xW150xH65		L260xW150xH135
Packaging Type	1*10layer=10PCS/carton		1*10layer=10PCS/carton
Packaging size(mm)	L395xW365xH390		L745xW365xH390
N.W.	13.9KG		16.8KG
G.W.	15.8KG/ Carton		18.7KG/ Carton
Lumen Maintenance	> 50,000 hours-L ₇₀ at 25 °C		
Certifications	CE、RoHS		

The tolerance range of test data above is 6%, but normally warm white is ±8%.





MLX SL STREET-A LED UTCAFEJ LÁMPÁK

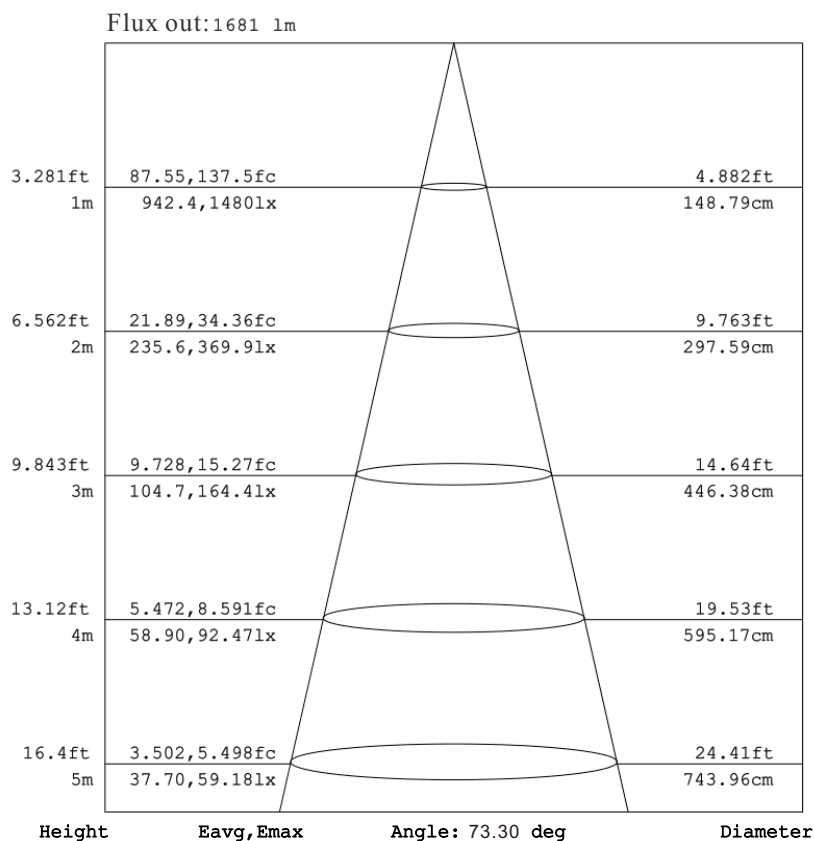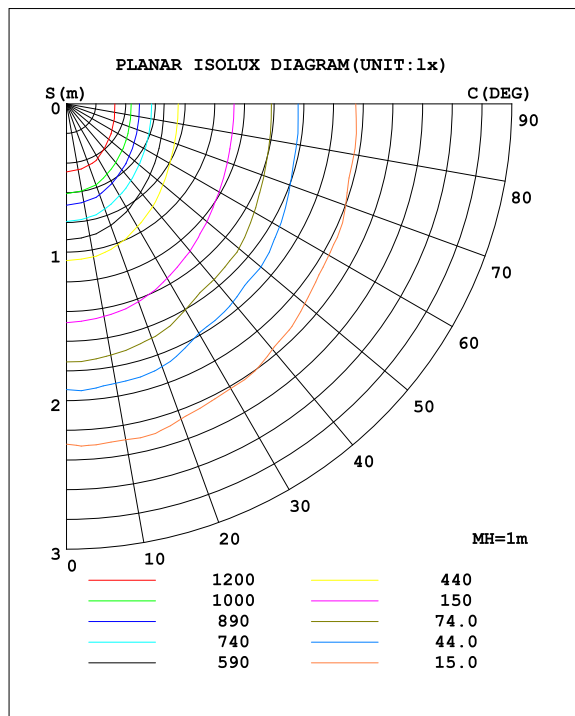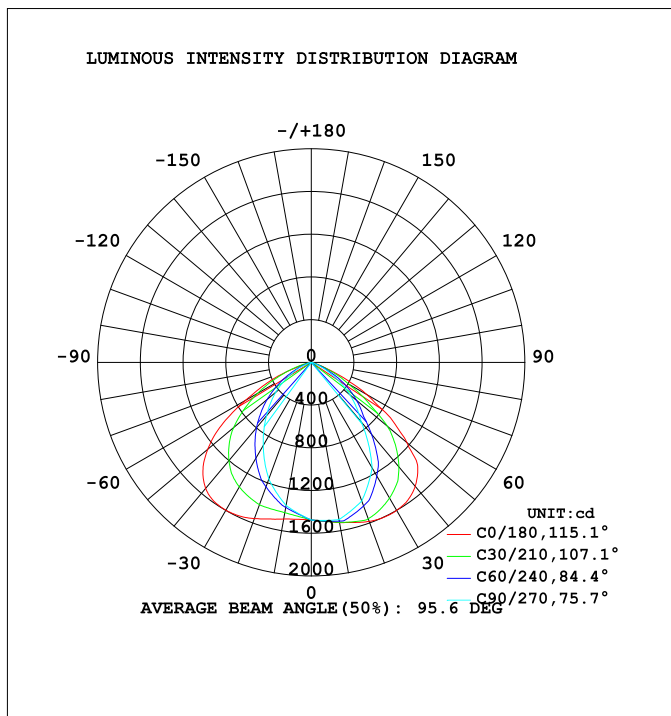



MLX SL STREET-A LED UTCAFEJ LÁMPÁK



Hagyományos

①



②



1 PCS



③



10 PCS

Fényszabályzós

①



②



1 PCS



③



10 PCS



MLX SL STREET-A LED UTCAFEJ LÁMPÁK



Adopted 2835/3030 SMD Led light source, Large-Size Chip with High brightness and low light fades, Enough Current margin, Led chip Rated current 150mA, actual use only 120mA, Extend led Lights lifespan and increase Light Efficiency.

Adopted OSRAM Driver, Universal AC Input/Full range up to AC 220-240V.
Protection function: short circuit/over current/over voltage/over temperature, Built-in. active PFC function, $PF \geq 0.95$ and Conversion efficiency $\geq 90\%$



Használható utak, parkolók, sportpályák, parkok és egyéb kültéri területek megvilágítására.

Kiváló utcai világítás a biztonságosabb, tisztább és egyenletesebb útkörnyezetért.

Nemcsak megbízható és tartós, hanem alacsony karbantartási költséggel is rendelkezik.

