

MLX HB LINO LED LINEÁRIS CSARNOKVILÁGÍTÓK



HL0019985
HL0019986
HL0019987
HL0019988
HL0019989



Függesztő készlet

(tartozék)




Rögzítő készlet

HL0019990




LED Driver







MLX HB LINO LED LINEÁRIS CSARNOKVILÁGÍTÓK

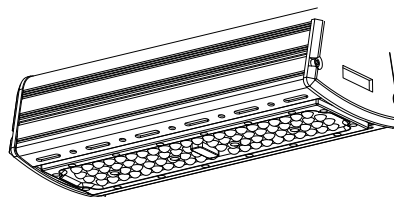


50W:

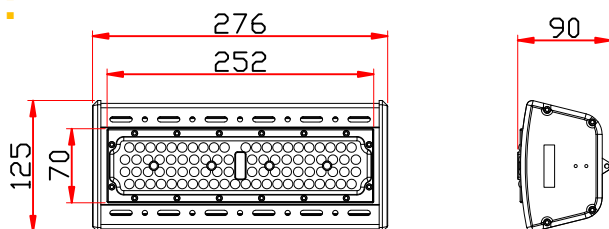


100W:

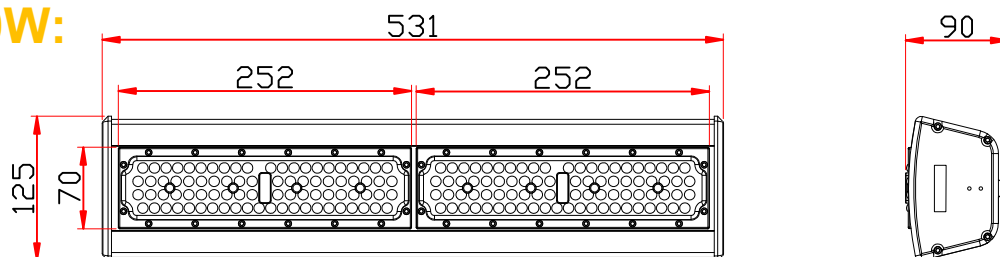

150W:

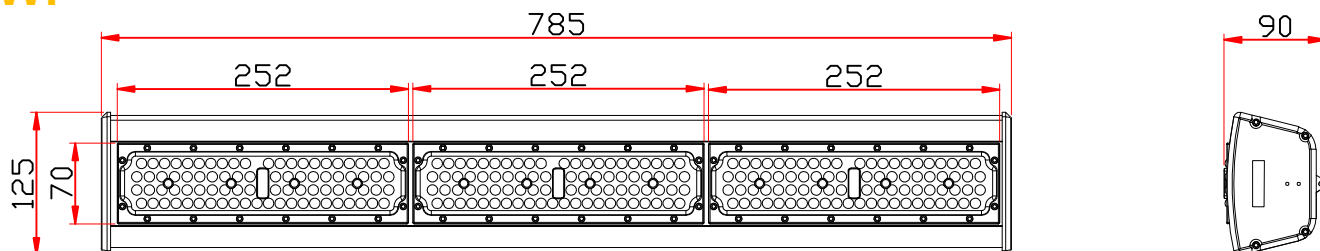





MLX HB LINO LED LINEÁRIS CSARNOKVILÁGÍTÓK



200W:

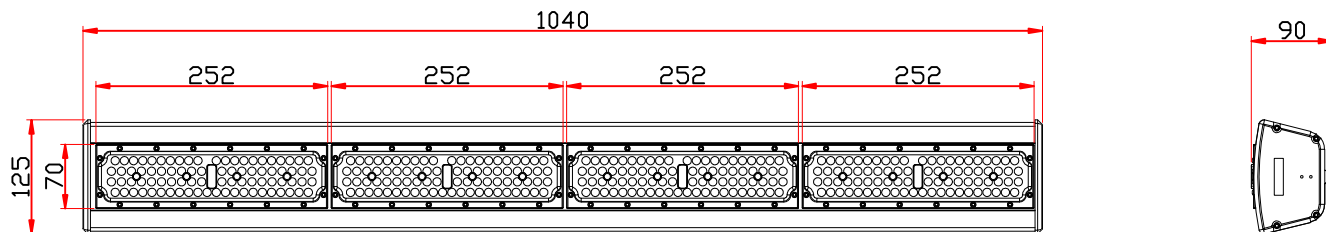


250W:

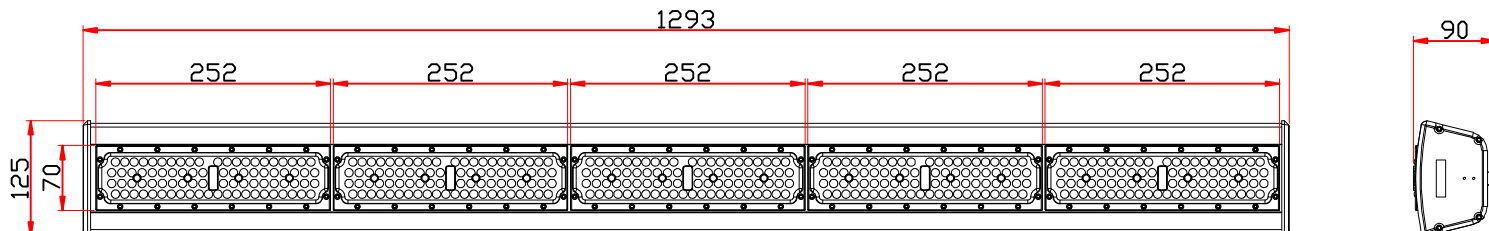

	Power	Product Size(L*W*H)
	50W	L276*W125*H90mm
	100W	L531*W125*H90mm
	150W	L785*W125*H90mm
	200W	L1040*W125*H90mm
	250W	L1293*W125*H90mm





MLX HB LINO LED LINEÁRIS CSARNOKVILÁGÍTÓK




50WSMD-230V-S

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.25A	DC192V	0.24A	50W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
SMD2835	84PCS	≥80Ra	Luminous flux	7000LM±10%	7500LM±10%	7500LM±10%
			Beam Angle	90° or 60°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	L276*W125*H90mm	1.6Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L315*W165*H145mm	1.8Kg	
Outer carton package	6*1layer=6PCS/carton,K=K corrugated paper, L355*W335*H480mm,GW:11.75KG					
Optional dimming type	0-10V Dimming					

100WSMD-230V-S

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.5A	DC252V	0.35A	100W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	14000LM±10%	15000LM±10%	15000LM±10%
			Beam Angle	90° or 60°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	L531*W125*H90mm	2.5Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L570*W165*H145mm	2.7Kg	
Outer carton package	4*1layer=4PCS/carton,K=K corrugated paper, L590*W355*H320mm,GW:11.45KG					
Optional dimming type	0-10V Dimming					





MLX HB LINO LED LINEÁRIS CSARNOKVILÁGÍTÓK




150WSMD-230V-S

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.75A	DC252V	0.55A	150W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	21000LM±10%	22500LM±10%	22500LM±10%
			Beam Angle	90° or 60°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	L785*W125*H90mm	3.3Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L825*W165*H145mm	3.6Kg	
Outer carton package	4*1layer=4PCS/carton,K=K corrugated paper, L845*W355*H320mm,GW:15.35KG					
Optional dimming type	0-10V Dimming					

200WSMD-230V-S

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.0A	DC252V	0.7A	200W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
SMD2835	336PCS	≥80Ra	Luminous flux	28000LM±10%	30000LM±10%	30000LM±10%
			Beam Angle	90° or 60°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	L1040*W125*H90mm	4.0Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1080*W165*H145mm	4.3Kg	
Outer carton package	4*1layer=4PCS/carton,K=K corrugated paper, L1100*W355*H320mm,GW:19. 1KG					
Optional dimming type	0-10V Dimming					







MLX HB LINO LED LINEÁRIS CSARNOKVILÁGÍTÓK



250WSMD-230V-S

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.2A	DC252V	0.9A	250W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	35000LM±10%	37500LM±10%	37500LM±10%
			Beam Angle	90° or 60°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	L1293*W125*H90mm	4.9Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1333*W165*H145mm	5.2Kg	
Outer carton package	4*1layer=4PCS/carton,K=K corrugated paper, L1353*W355*H320mm,GW:22.8KG					
Optional dimming type	0-10V Dimming					

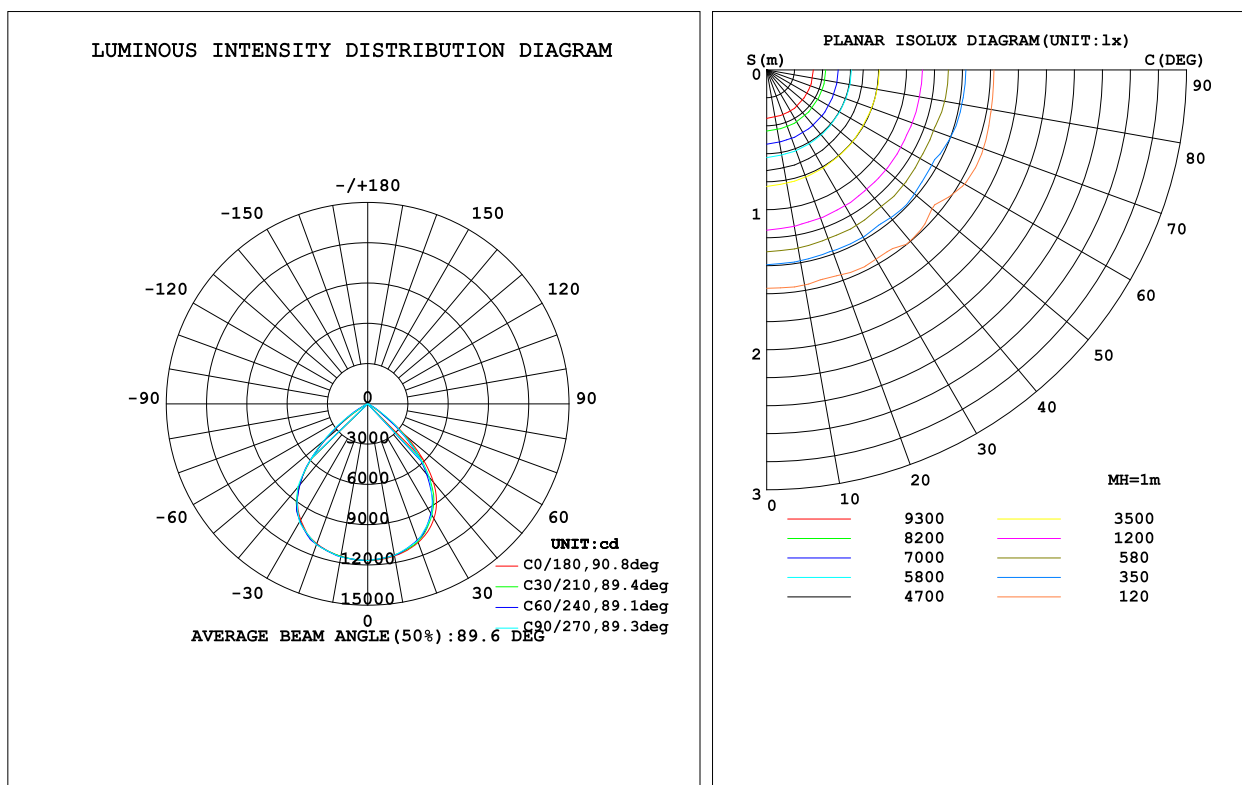



MLX HB LINO LED LINEÁRIS CSARNOKVILÁGÍTÓK



with




Inner Box

1 PCS




Outer Carton

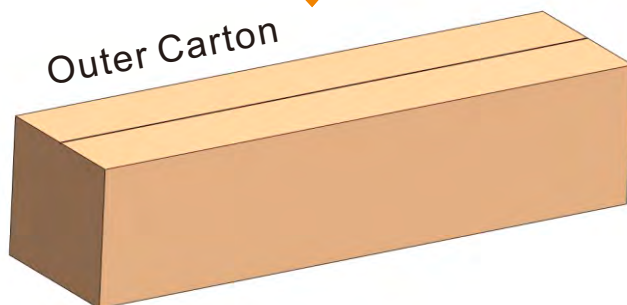

Power	Outer Carton Package QTY
50W	6 PCS/carton
100W	4 PCS/carton
150W	4 PCS/carton
200W	4 PCS/carton
250W	4 PCS/carton







MLX HB LINO LED LINEÁRIS CSARNOKVILÁGÍTÓK




1. Függesztve




Step 1: Take the kit out of the box;

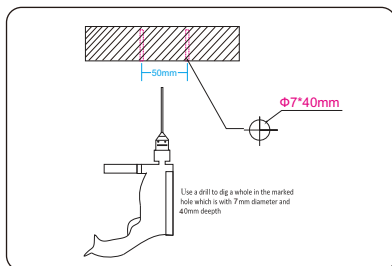


Step 2: Drill holes in the installation position, Spacing of fitting holes is 50mm;

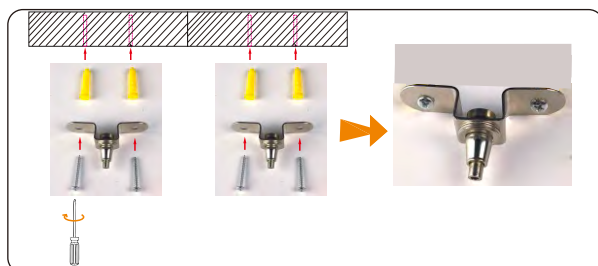

Step 3: Lock the fittings to the holes;



Step 4: Tie the wire rope;

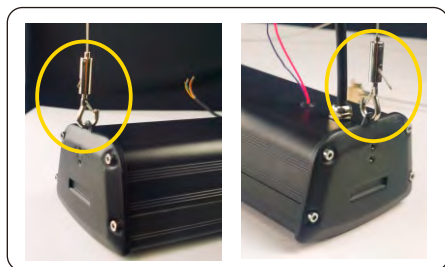

Step 5: Attach the two hooks to each end of the lamp;




Step 6: Done (the suspension height can be adjusted);


2. Rögzítve




Step 1: Prepare the kit;




Step 2: Install the fitting at each end of the lamp;

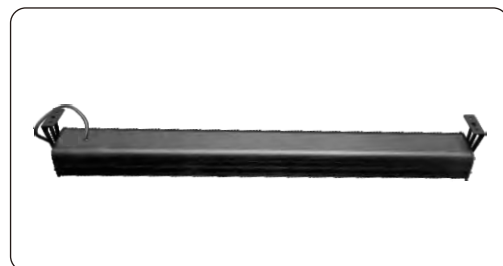


Step 3: As shown in the figure;

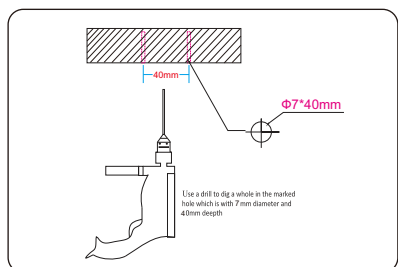

Step 4: Drill holes in the wall according to the hole positions of the fittings, Spacing of fitting holes is 40mm;

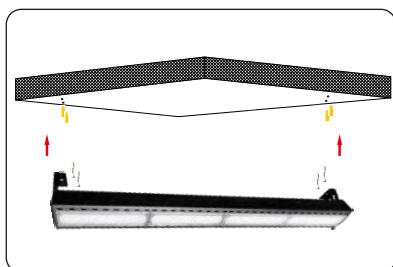


Step 5: Screw the lamp to the wall;

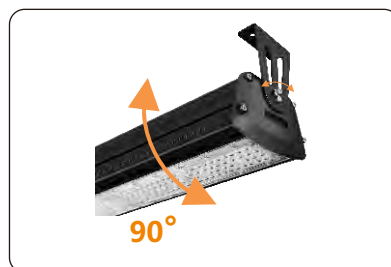

Step 6: Done (adjustable angle);





MLX HB LINO LED LINEÁRIS CSARNOKVILÁGÍTÓK



Bekötési diagram

