




MLX HB DAVE LED CSARNOKVILÁGÍTÓK



HL0020012
HL0019670
HL0020013
HL0020014



100W



150W



200W



240W






LED Meghajtó









MLX HB DAVE LED CSARNOKVILÁGÍTÓK

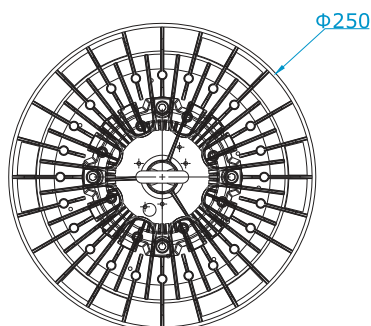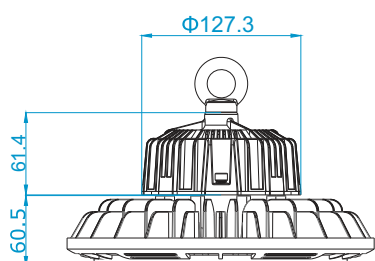



100W

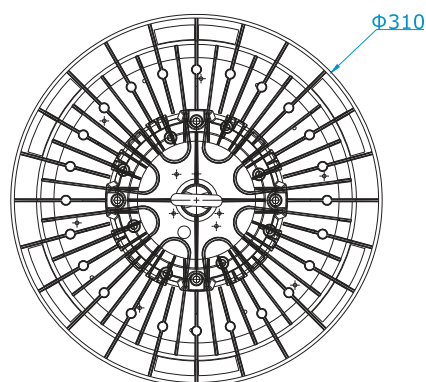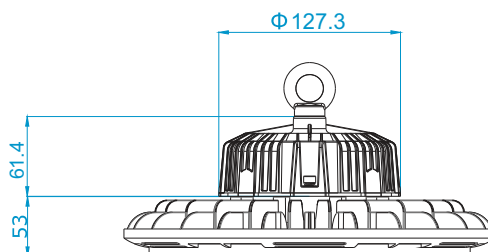

150W

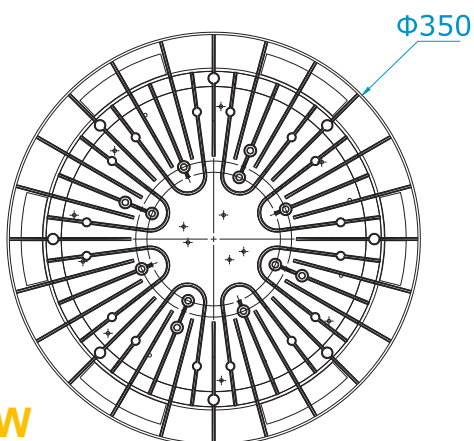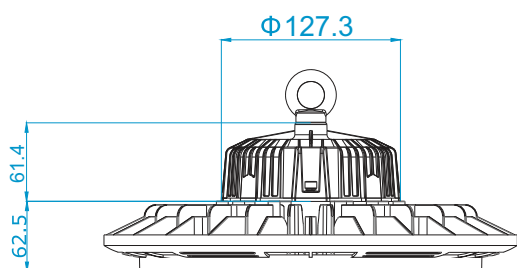

200W

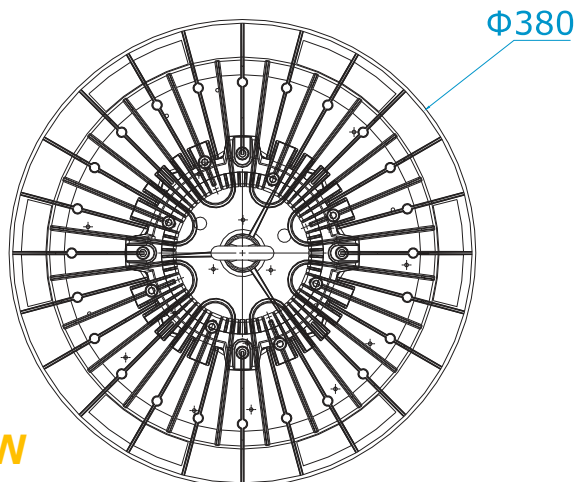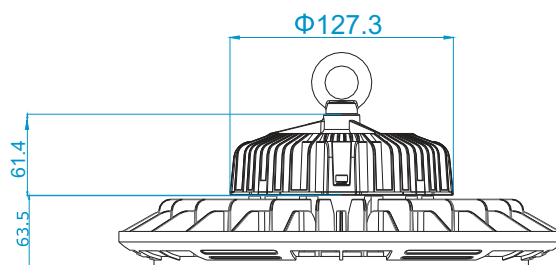


240W







MLX HB DAVE LED CSARNOKVILÁGÍTÓK



100W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.5A	DC210V	0.42A	100W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	14000LM±10%	15000LM±10%	15000LM±10%
			Beam Angle	120° or 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ250*122mm	2.55Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L280*W280*H150mm	2.85Kg	
Outer carton package	4*1layer=4PCS/carton,K=K corrugated paper, L585*W295*H340mm,GW:12.14KG					
Optional dimming type	DALI dimming 					


150W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.75A	DC210V	0.64A	150W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	21000LM±10%	22500LM±10%	22500LM±10%
SMD2835	210PCS	≥80Ra	Beam Angle	120° or 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ310*114mm	3.2Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L340*W340*H140mm	3.5Kg	
Outer carton package	3*1layer=3PCS/carton,K=K corrugated paper, L360*W360*H465mm,GW:11. 3KG					
Optional dimming type	DALI dimming 					





MLX HB DAVE LED CSARNOKVILÁGÍTÓK




200W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.0A	DC210V	0.85A	200W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	28000LM±10%	30000LM±10%	30000LM±10%
			Beam Angle	120° or 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ350*124mm	3.8Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L380*W380*H150mm	4.2Kg	
Outer carton package	3*1layer=3PCS/carton,K=K corrugated paper, L400*W400*H495mm,GW:13.7KG					
Optional dimming type	DALI dimming 					


240W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.2A	DC216V	1.04A	240W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	33600LM±10%	36000LM±10%	36000LM±10%
SMD2835	360PCS	≥80Ra	Beam Angle	120° or 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ380*125mm	4.8Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L410*W410*H155mm	5.1Kg	
Outer carton package	2*1layer=2PCS/carton,K=K corrugated paper, L430*W430*H350mm,GW:11.6KG					
Optional dimming type	DALI dimming 					









MLX HB DAVE LED CSARNOKVILÁGÍTÓK



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

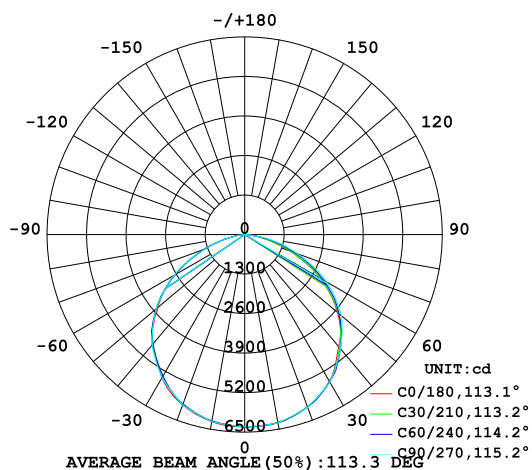

PLANAR ISOLUX DIAGRAM (UNIT: lx)

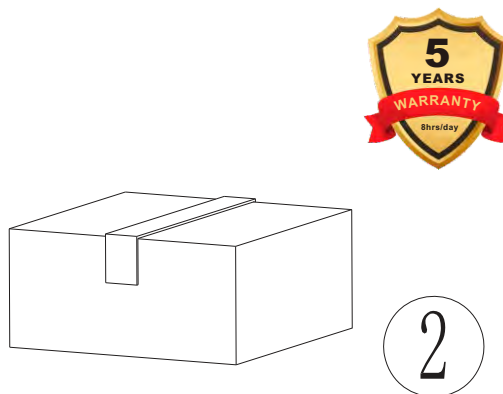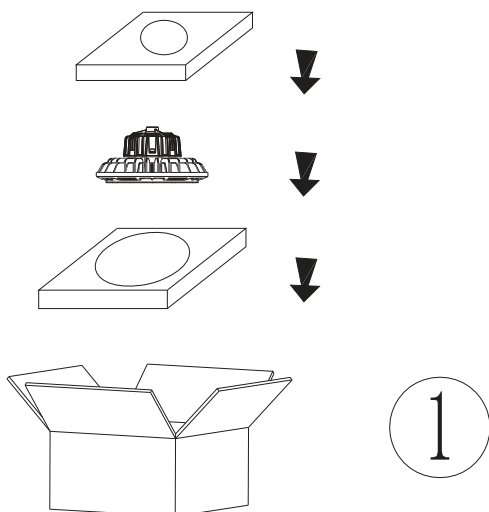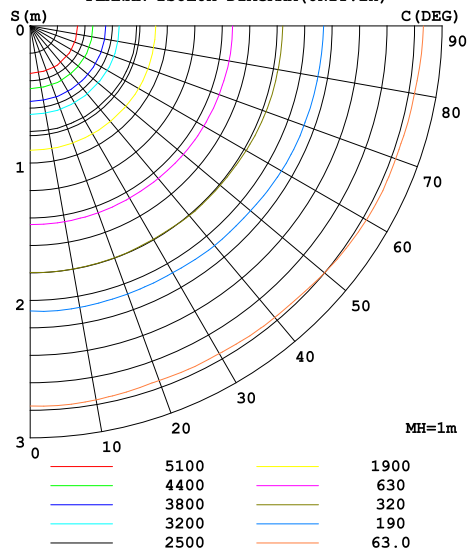



MLX HB DAVE LED CSARNOKVILÁGÍTÓK

