




MLX HB DAVE LED CSARNOKVILÁGÍTÓK



HL0020012
HL0019670
HL0020013
HL0020014



100W



150W




200W




240W





LED Meghajtó


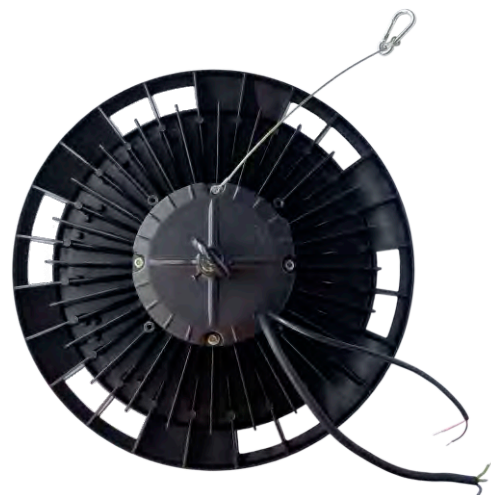






MLX HB DAVE LED CSARNOKVILÁGÍTÓK

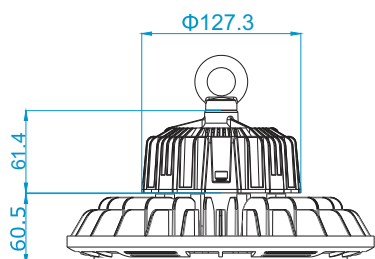



100W

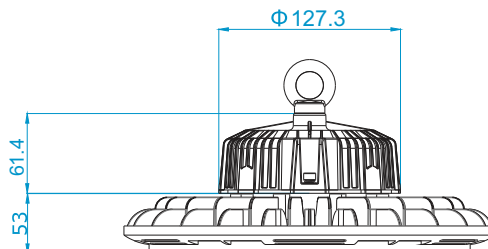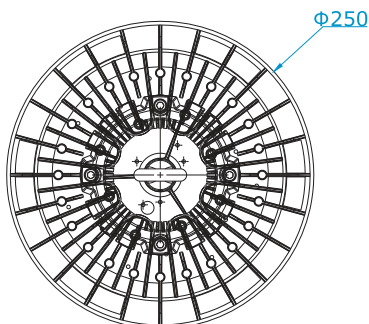


150W

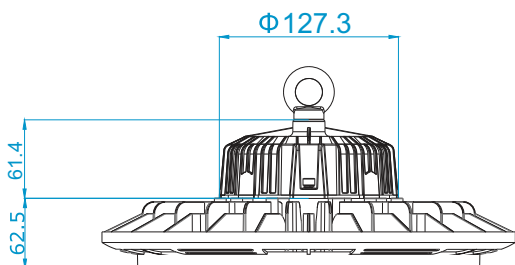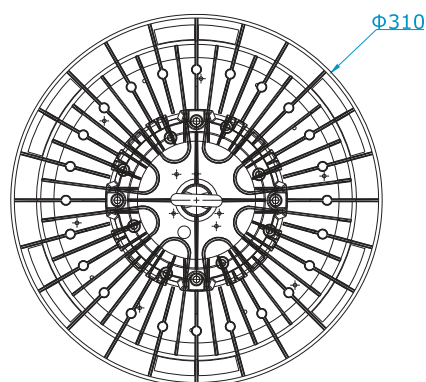

200W


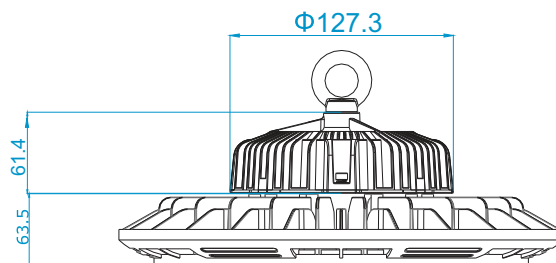
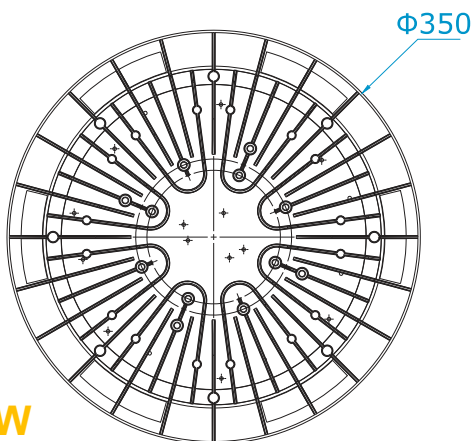


240W

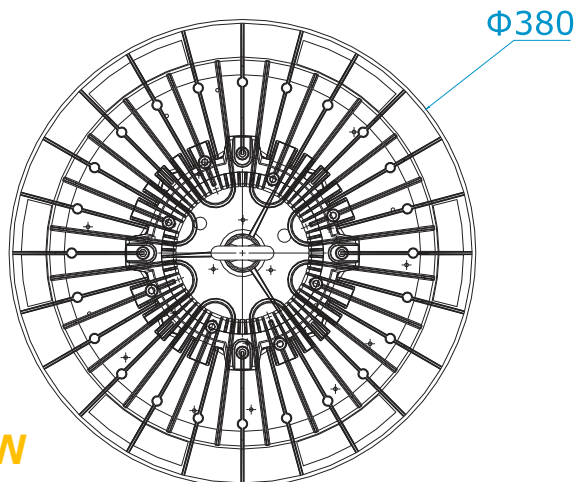




MLX HB DAVE LED CSARNOKVILÁGÍTÓK

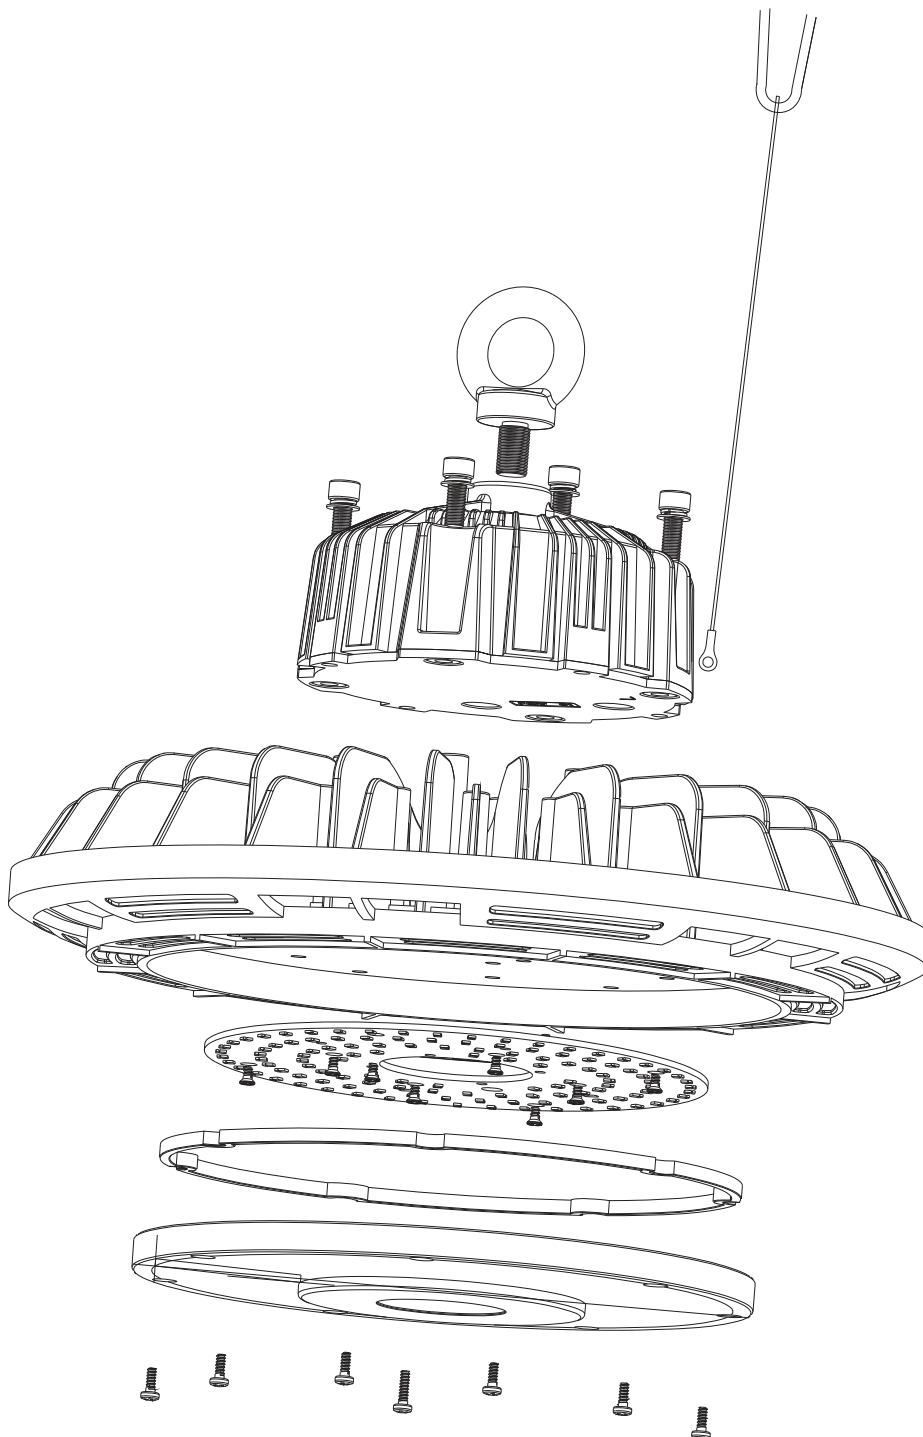



MLX HB DAVE LED CSARNOKVILÁGÍTÓK



100W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.5A	DC210V	0.42A	100W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	14000LM±10%	15000LM±10%	15000LM±10%
			Beam Angle	120° or 90°		
SMD2835	140PCS	≥80Ra				
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ250*122mm	2.55Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L280*W280*H150mm	2.85Kg	
Outer carton package	4*1layer=4PCS/carton,K=K corrugated paper, L585*W295*H340mm,GW:12.14KG					
Optional dimming type	DALI dimming 					


150W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.75A	DC210V	0.64A	150W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	21000LM±10%	22500LM±10%	22500LM±10%
SMD2835	210PCS	≥80Ra	Beam Angle	120° or 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ310*114mm	3.2Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L340*W340*H140mm	3.5Kg	
Outer carton package	3*1layer=3PCS/carton,K=K corrugated paper, L360*W360*H465mm,GW:11. 3KG					
Optional dimming type	DALI dimming 					





MLX HB DAVE LED CSARNOKVILÁGÍTÓK




200W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.0A	DC210V	0.85A	200W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	28000LM±10%	30000LM±10%	30000LM±10%
			Beam Angle	120° or 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ350*124mm	3.8Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L380*W380*H150mm	4.2Kg	
Outer carton package	3*1layer=3PCS/carton,K=K corrugated paper, L400*W400*H495mm,GW:13.7KG					
Optional dimming type	DALI dimming 					


240W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.2A	DC216V	1.04A	240W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	140LM/W	150LM/W	150LM/W
			Luminous flux	33600LM±10%	36000LM±10%	36000LM±10%
SMD2835	360PCS	≥80Ra	Beam Angle	120° or 90°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	Φ380*125mm	4.8Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L410*W410*H155mm	5.1Kg	
Outer carton package	2*1layer=2PCS/carton,K=K corrugated paper, L430*W430*H350mm,GW:11.6KG					
Optional dimming type	DALI dimming 					









MLX HB DAVE LED CSARNOKVILÁGÍTÓK



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

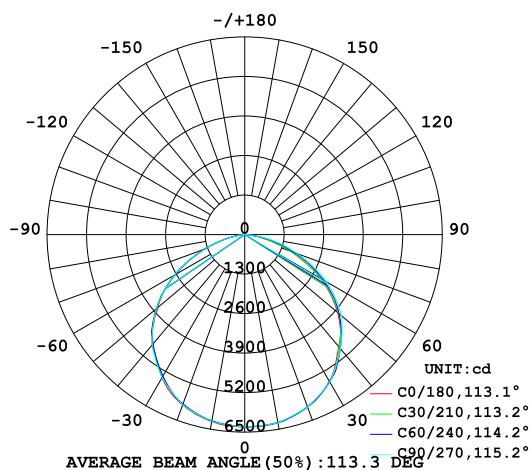

PLANAR ISOLUX DIAGRAM (UNIT: lx)

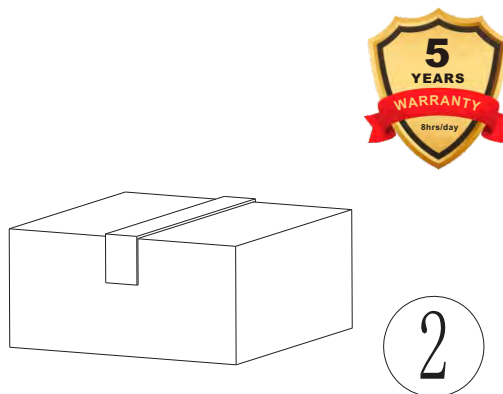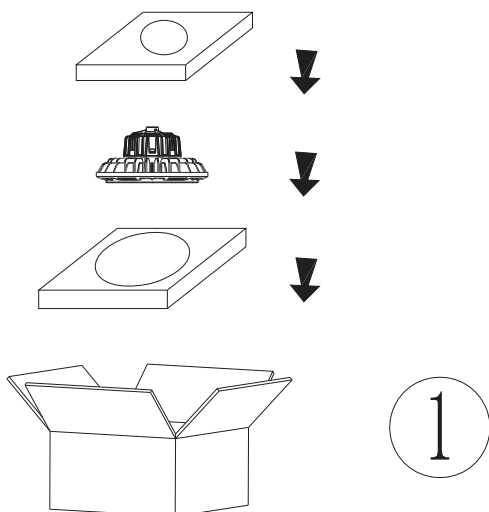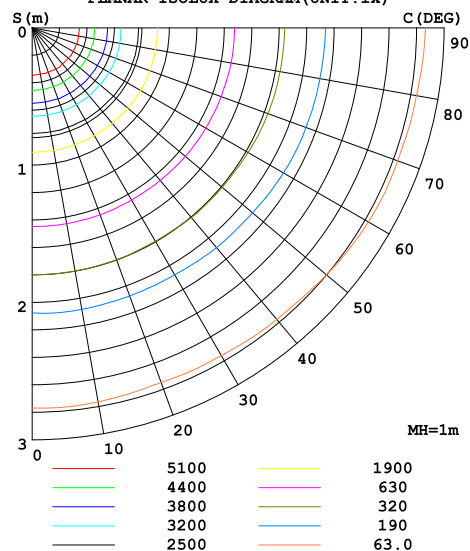



MLX HB DAVE LED CSARNOKVILÁGÍTÓK

