




MLX DL FIX-A LED MÉLYSUGÁRZÓK



HL0020093
HL0020094
HL0020095
HL0019882
HL0020096



Flicker Free LED Driver



6000K


4000K

3000K




Aluminum radiator





MLX DL FIX-A LED MÉLYSUGÁRZÓK




9W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.04A	DC36V	200mA	9W	≥0.5	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	90LM/W	100LM/W	100LM/W
SMD2835	18PCS	≥80Ra	Luminous flux	810LM	900LM	900LM
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP20	ClassIII	Φ115*H42MM	0.19Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L130*W50*H130MM	0.21Kg	
Outer carton package	50*1layer=50PCS/carton,K=K corrugated paper, L675*W275*H280mm,GW:13KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					


12W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.05A	DC36V	300mA	12W	≥0.5	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	90LM/W	100LM/W	100LM/W
SMD2835	24PCS	≥80Ra	Luminous flux	1080LM	1200LM	1200LM
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP20	ClassIII	Φ145*H48MM	0.27Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L150*W60*H150MM	0.3Kg	
Outer carton package	50*1layer=50PCS/carton,K=K corrugated paper, L775*W275*H315mm,GW:16.2KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					





MLX DL FIX-A LED MÉLYSUGÁRZÓK




18W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.08A	DC36V	450mA	18W	≥0.5	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	90LM/W	100LM/W	100LM/W
			Luminous flux	1620LM	1800LM	1800LM
SMD2835	36PCS	≥80Ra	Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP20	ClassIII	Φ195*H62MM	0.45Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L213*W70*H213MM	0.51Kg	
Outer carton package	20*1layer=20PCS/carton,K=K corrugated paper, L440*W370*H440mm,GW:11KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					


24W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.1A	DC36V	550mA	24W	≥0.5	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	90LM/W	100LM/W	100LM/W
			Luminous flux	2160LM	2400LM	2400LM
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP20	ClassIII	Φ195*H62MM	0.45Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L213*W70*H213MM	0.51Kg	
Outer carton package	20*1layer=20PCS/carton,K=K corrugated paper, L440*W370*H440mm,GW:11KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					





MLX DL FIX-A LED MÉLYSUGÁRZÓK




30W-230V

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.13A	DC36V	700mA	30W	≥0.9	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	90LM/W	100LM/W	100LM/W
SMD2835	60PCS	≥80Ra	Luminous flux	2700LM	3000LM	3000LM
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP20	ClassIII	Φ225*H63MM	0.63Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L230*W78*H230MM	0.7Kg	
Outer carton package	20*1layer=20PCS/carton,K=K corrugated paper, L490*W420*H490mm,GW:15KG					
Optional dimming type	1-10V dimming / Thyristor dimming / DALI dimming					




	(D1*H)	(D2)	Kivágási méret (D3)
	Φ115*42mm	Φ61mm	Φ95mm
	Φ145*48mm	Φ92mm	Φ125mm
	Φ195*62mm	Φ130mm	Φ170mm
	Φ195*62mm	Φ130mm	Φ170mm
	Φ225*63mm	Φ160mm	Φ200mm











MLX DL FIX-A LED MÉLYSUGÁRZÓK




18W-230V



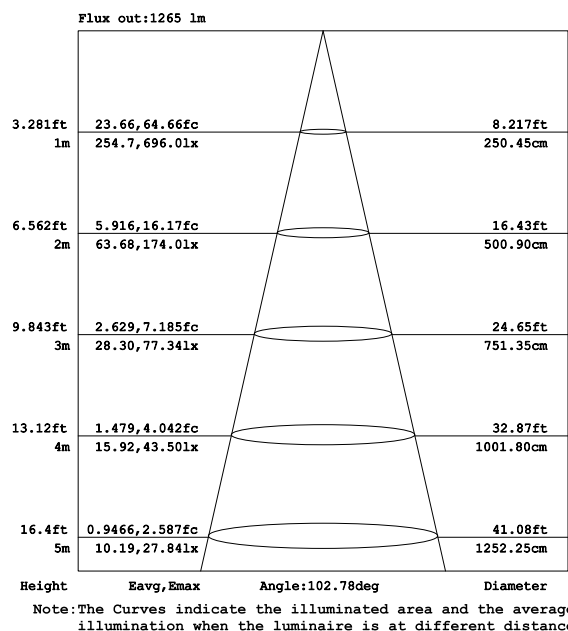
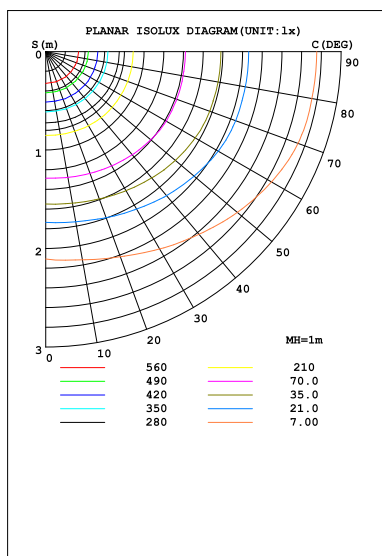
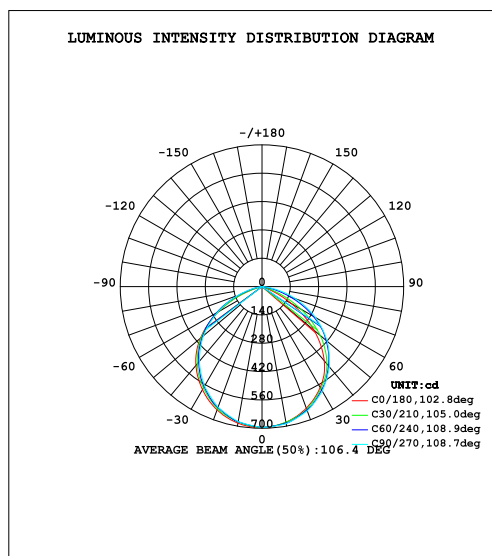


30W-230V

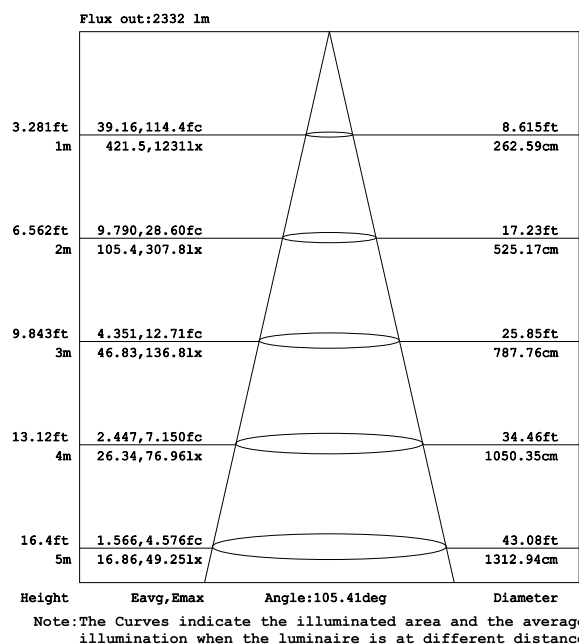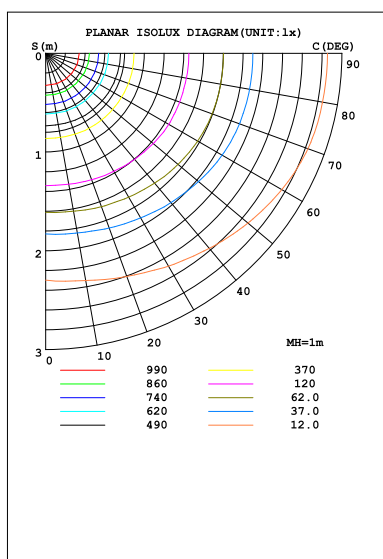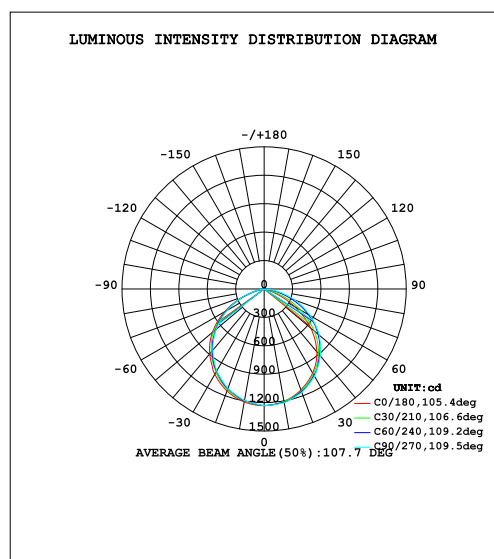



MLX DL FIX-A LED MÉLYSUGÁRZÓK

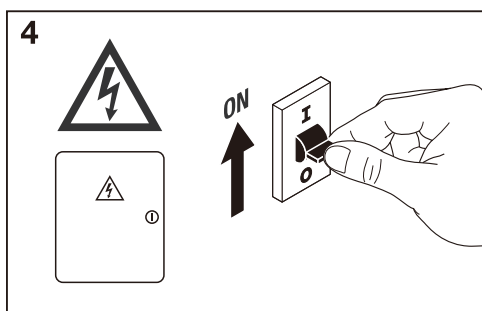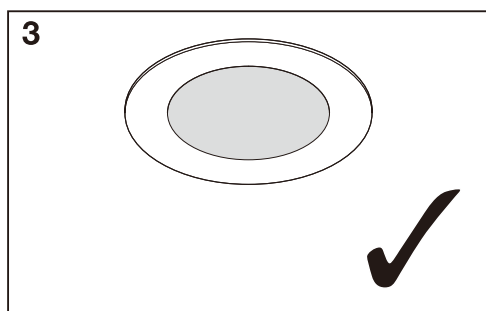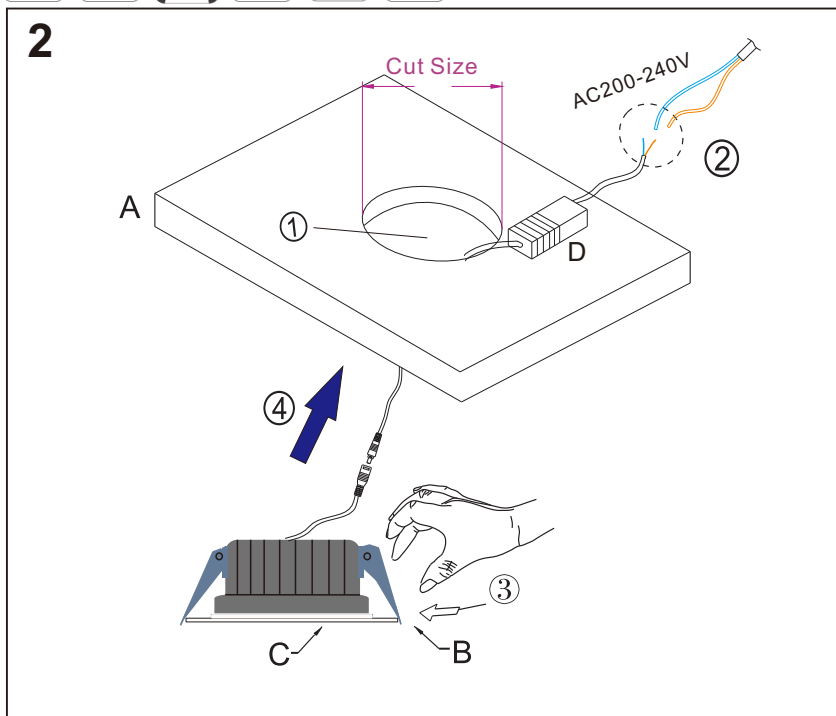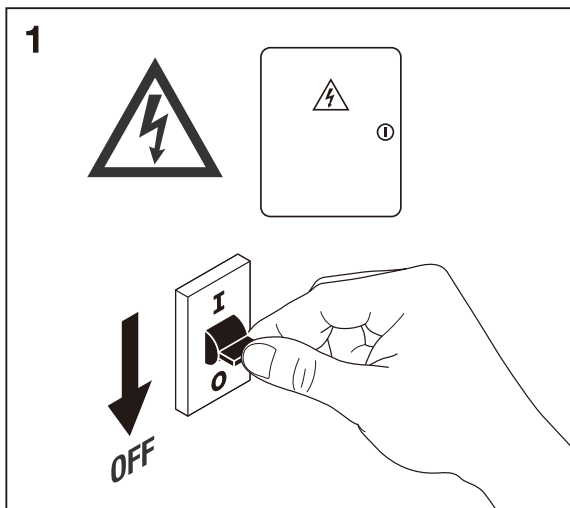

Power	Packaging Quantity
9W	50 db/karton
12W	50 db/karton
18W	20 db/karton
24W	20 db/karton
30W	20 db/karton

