

Cikkszám: HL0020097

MLX WP FELIX LED POR- ÉS PÁRAMENTES SOROLHATÓ LÁMPATEST



x1




Include





Kábelt nem tartalmazza!






Cikkszám: HL0020097

MLX WP FELIX LED POR- ÉS PÁRAMENTES SOROLHATÓ LÁMPATEST

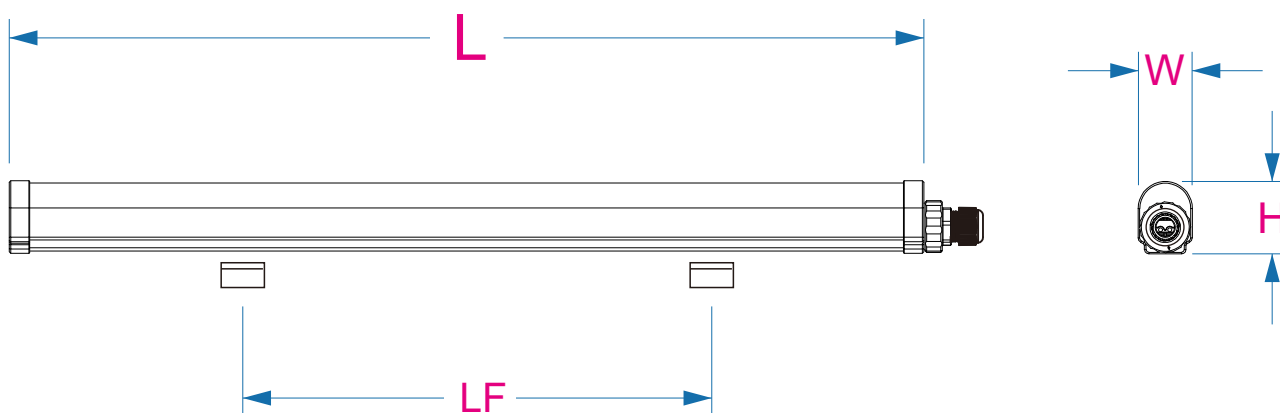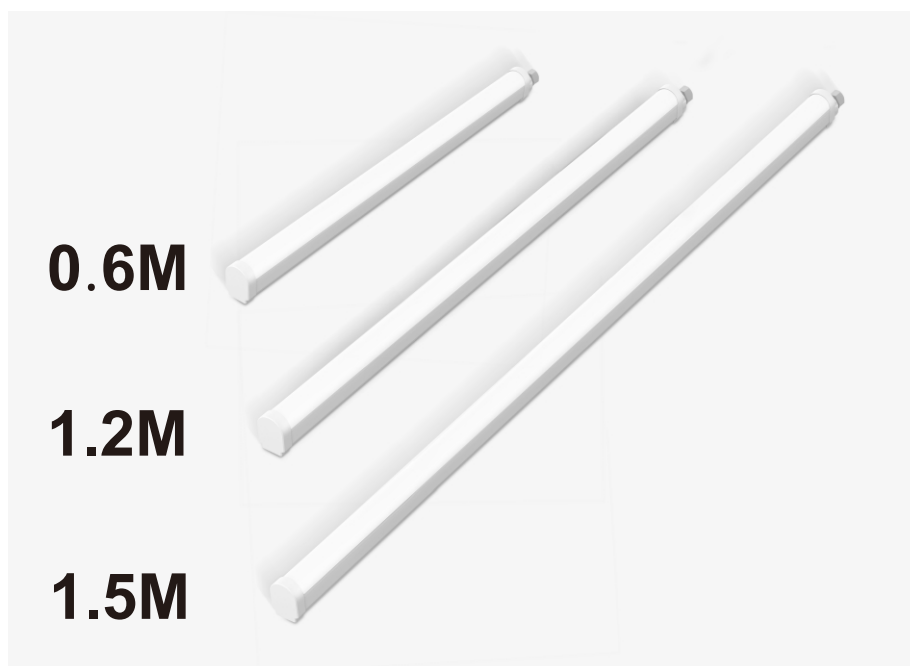

	Power	Product Size(L*W*H)	Fixing Hole Centre(LF)
	18W	L600*W36*H48mm	470mm
	32W	L1200*W36*H48mm	1020mm
Cikkszám: HL0020097	45W	L1500*W36*H48mm	1320mm





Cikkszám: HL0020097

MLX WP FELIX LED POR- ÉS PÁRAMENTES SOROLHATÓ LÁMPATEST





45W-1530

Cikkszám: HL0020097


Input Voltage	Max.Current	Operating Voltage	Constant Current		Power Consumption		Power Factor
AC200-240V	0.19A	DC162V	0.28A		45W		≥0.95
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K	
			Luminous efficiency	130LM/W	140LM/W	140LM/W	
			Luminous flux	5850LM±10%	6300LM±10%	6300LM±10%	
SMD2835	270PCS	≥80Ra					
Life Time	Certifications	IP Code	Luminaires Class		product dimension		N.W
50.000Hours	CE,RoHS	IP65	Class II		L1500*W36*H48mm		0.5Kg
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage		Packing dimension		G.W
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH		L1590*W51*H39mm		0.55Kg
Outer carton package	25*1layer=25PCS/carton,K=K corrugated paper, L1605*W275*H215mm,GW:16.65KG						
Optional dimming type	Non Dimmable						

Cikkszám: HL0020097

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

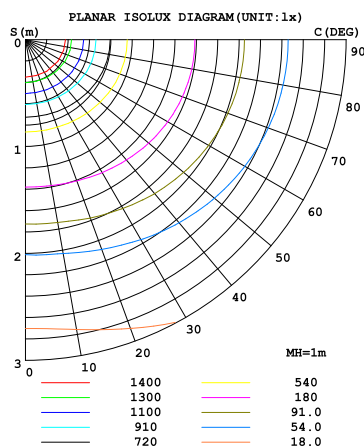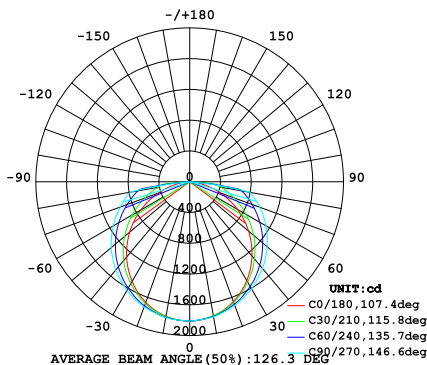

Flux out:3704 lm

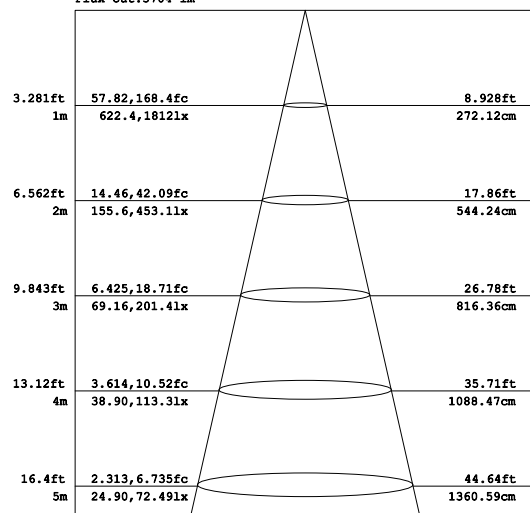

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.




MANUAL INSTRUCTION




Safety Notice:

- 1 Installation should be done by registered electricians.
- 2 Never touch the working luminaire
- 3 In any case of malfunction, switch off the power supply immediately, and do not try to repair it yourself.
- 4 Repairment should only be done by registered electricians or official service agent.

Include




Not Include



Model	Power	Fixing Hole Centre
SR05-18W-630 INJECTION ITEM	18W	470mm
SR05-32W-1230 INJECTION ITEM	32W	1020mm
SR05-45W-1530 INJECTION ITEM	45W	1320mm


If In Series

Model	Connection	Qty Max(pcs)
SR05-18W-630		60
SR05-32W-1230		30
SR05-45W-1530		20




WARNING


Switch off the power supply before installation




1. Drill a $\varnothing 6\text{mm}$ hole



2. According to the Fixing hole centre, instal expansion bolts and screws, instal the bracket.



3. Fix the luminaire with the brackets

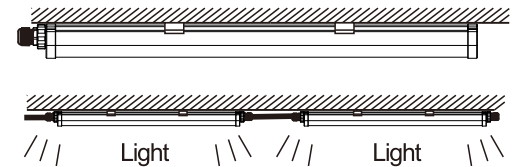


4. Finish installation


1




2




3

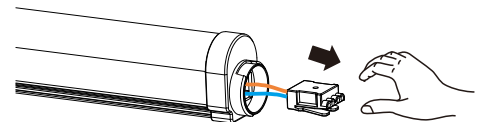


4

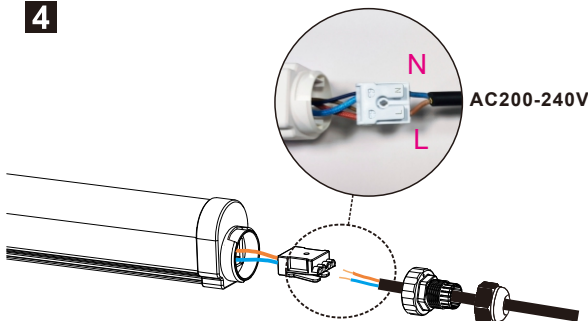

5

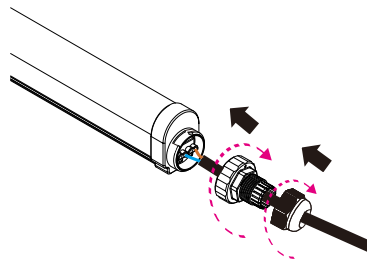



6



WARNING

Switch off the power supply before installation





Cikkszám: HL0020097

MLX WP FELIX LED POR- ÉS PÁRAMENTES SOROLHATÓ LÁMPATEST




	Power	Packing QTY
	18W	40 pcs/carton
	32W	25 pcs/carton
HL0020097	45W	25 pcs/carton

Cautions:

- 1.This product must be installed by professionals;
- 2.If there is any damage on the power line or shell, it should be taken as defective product and should not be used;
- 3.High voltage, non-professionals are not allowed to install, disassemble the product or connect wires.





MLX PL FELIX LED PANELEK



Jellemzők:

Megbízható LED-technológia a karbantartásmentes telepítéshez és a hosszú élettartamhoz.

Közvetlenül helyettesíti a hagyományos vízálló lámpatesteket a fény tekintetében.

Teljesítmény, telepítési rugalmasság és hosszúság.

Több mint 70%-os energiamegtakarítás a hasonló LED-es teljesítményű hagyományos lámpákhoz képest.

Alkalmazási terület:

Beltéri helyek: konyhák, fürdőszobák, pincék, garázsok, raktárak stb. Beltéri használatra alkalmasak, ellenállnak a páratartalomnak, a pornak és a vízgőznek.

Ipari helyek: például erőművek, acélgyárak, petrokémiai üzemek, hajók stb. Ezek a helyek zord környezettel rendelkeznek, és a lámpákkal szemben magas szintű védelmi követelményeknek kell megfelelniük.

Kültéri környezet: például stadionok, parkolók, pincék stb., a háromrétegű lámpák szél, eső és más természeti tényezők hatására is normálisan működnek.

Különleges helyek: például óceánok, hajók, kórházi műtők stb. Ezek a helyek magas világítási követelményekkel rendelkeznek, és a háromrétegű lámpák nagy fényerejű fényhatásokat biztosítanak.

