

## LED spot | 50mm | white | 5 watt | 38° | 2000~2700K | dtw



Tronix Lighting introduces the perfect substitute for all Ø50mm GU10 Spots: a similar sized all-performance LED Spot that has an incredibly stable (dim to warm 2000k-2700K) function and does NOT flicker.

It often occurs that normal GU10 Spots cannot be applied because of a lack of space. This alternative LED Spot with internal led driver only counts 26 mm in height (31 mm with cable) for a suitable fit with just any ceiling application.

In addition, this competitive light source has a connection block with strain relief, enabling a direct connection onto 230V: a winning solution for every installer!

For a perfect dim to warm result, use the LED Spot with the Tronix universal Triac LED Dimmer (art. no. 215-131).

## Features

- 50mm spot replaces GU10 light source
- Stable and flicker-free
- connection block: L66xW28xH26,5 mm
  Cable 15 cm
- Perfectly dim to warm with universal Triac dimmer 215-131

Article number:	175-555
CHANGED_LAST:	04-03-2024
Brand:	Tronix Lighting
Туре:	50 mm
ETIM Group:	EG000028 - Lamps
ETIM Classes:	EC001959 - LED-lamp/Multi-LED
SYNONYM:	Bulblamp, Candlelamp, Globelamp, Lamp, LED, LED candle, LED capsule, LED lamp, LED luster

Page: 1/4

















Page: 2/4

guided by light







tronixlighting.com





## Feature

Nominal voltage:	230 ~ 230 V	Beam angle:	38 ~ 38 °
Nominal current:	22 ~ 22 mA	Colour consistency (McAdam ellipse):	SDCM6
Power factor:	0.9	Dimmable:	Yes
Lamp power:	5 ~ 5 W	Diameter:	50 mm
Voltage type:	AC	Length:	26 mm
Luminous flux:	550 ~ 550 lm	Degree of protection (IP):	IP20
Rated luminous flux according to IEC 62612:	0 lm	Lamp designation:	Other
Lamp efficacy:	110 lm/W	Min. number of switching cycles:	15000
Luminous intensity:	0 cd	Total harmonic distortion:	17
Colour rendering index CRI:	80-89	Weighted energy consumption in 1000 hours:	5 kWh
Lamp shape:	Other	Average nominal lifespan:	25000 h
Filament lamp:	No	Remote operation possible:	No
Type of glass/cover:	Clear	With remote control:	No
Colour of light according to EN 12464-1:	Warm white <3300 K	Photobiological safety according to EN 62471:	RG0
Socket:	Screwed terminal	Compatible with Apple HomeKit:	No
Colour:	White	Compatible with Google Assistant:	No
Colour temperature:	2200 ~ 2700 K	Compatible with Amazon Alexa:	No
Housing colour:	White	IFTTT support available:	No

## Packaging data

80 gr
58 mm
50 mm
74 mm
9405114090

Page: 3/4














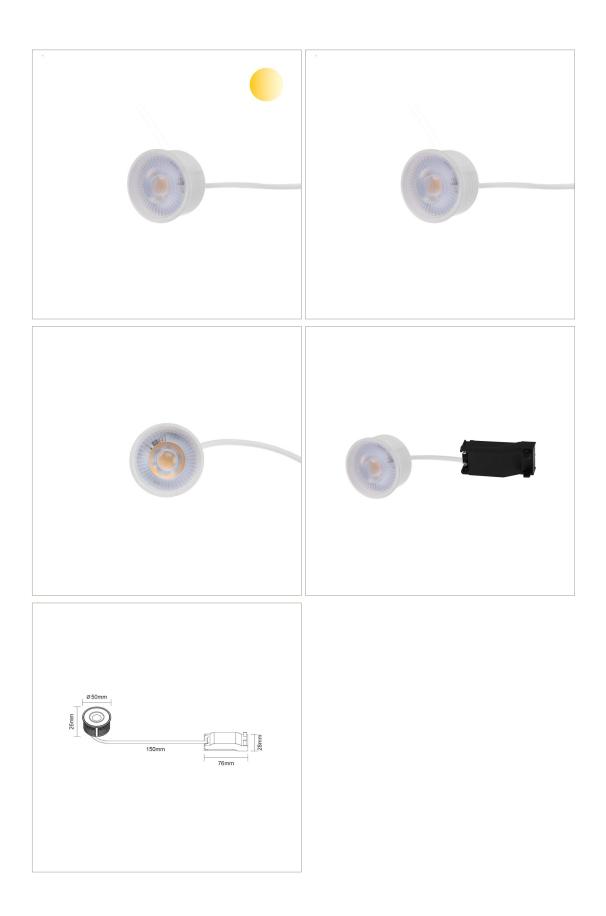

Page: 4/4

guided by light





