


TM.ONTEC G E1E 180 M ST



Catalog number	TM-OG.EESTM800W
Duration time	3 h
Operating mode	M
Version	ST – for button test
Colour	RAL9003
Visibility	25 m
Luminance	>350 cd/m²
Maximum light power (the luminaire can power the light source with a different power)	0.9 W
Active power	3.0 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	20÷57 V DC, 186÷254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
Appliance classes	2
IP	IP20
IK	IK05
Battery	LiFePO4/C (LN) 3.2V 1.5-1.6Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

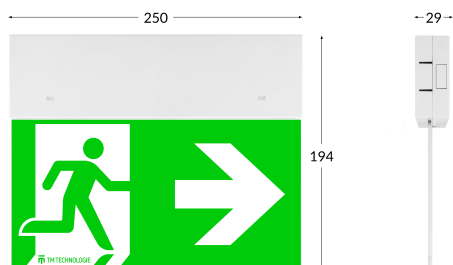