

URBAN 01 - M

Typology

Urban 01 street lights are the solution for residential lighting. Perfect for tree-lined avenues, gardens, car parks and outdoor residential and commercial areas. IP65.

Features

With an efficiency of 160 lm/W, they offer an operating saving of 90% (without taking into account the reduced need for technical intervention) compared to older discharge lamp systems, pay for themselves in a short time and provide effective, long-lasting and flicker-free lighting.

Installation

Can be used on standard 60 mm poles and wall arms. Rotation joint up to 90 degrees. Equipped with 6kV overvoltage protection required for use in public environments.

Material

Die-cast aluminium body with epoxy paint finish. Transparent polycarbonate screen with high light transmission and diffusion.




PRO	100-240 Vac	Ra 70		50000 h L70B20	IP65	IK06	Free Wire	-25°C +40°C	Risk Group 1

Characteristic data

Power	100 W	Dimmable	No	Input	100-240 Vac	Base	Free Wire
IP	65	Flux	14850 lm	Axis	4900 cd	PF	0,91
Tc	4000 K	Ra	70	LED Warranty	G5	IK	IK06
RG	RG1						

Dimensional characteristics



L	179 mm
L1	95 mm
H	567 mm

Lighting and photometric features



Flux	14850 lm
Axis	4900 cd
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	70
Lifespan	50000 h
LED lifespan	L70B20

Electrical characteristics

Rated power	100 W
Input voltage	100-240 Vac
Frequency	50/60 Hz
Dimmable	No
Power factor (PF)	0,91
Operating temperature	-25°C / +40°C

Other Infotech

Flicker Free	Yes
Light source replaceability	Replaceable light source by a professional.
Control gear replaceability	Replaceable control gear by a professional.

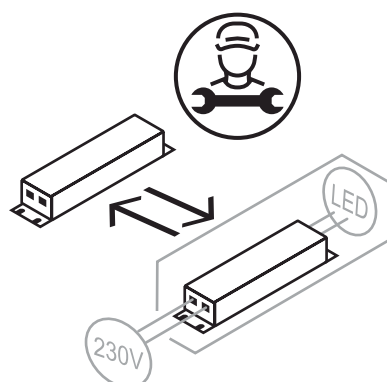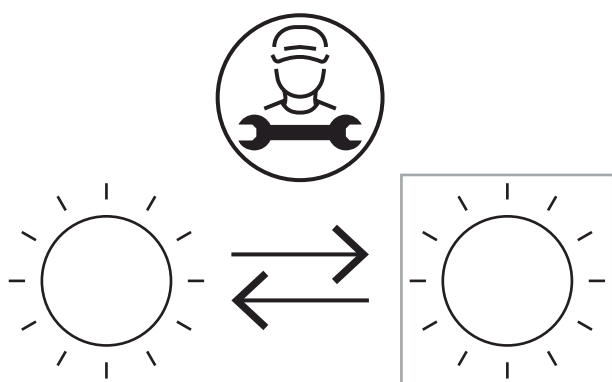

LED Warranty

G5	undefined
----	-----------

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC
 2014/35/EU * LVD
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 60598-1:2022
 CEI EN 60598-2-5:2016
 CEI EN 61000-3-2:2019 (+A1:2021)
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
 CEI EN 61547:2010
 CEI EN 62031:2021 (+A11:2022)
 CEI EN 62471:2010
 IEC/TR 62471-2:2009
 CEI EN 62493:2015
 CEI 34-141:2014

Logistics data

Item net weight	1416 gr
Barcode single item	8011905335762
Minimum order quantity	1
Minimum packaging	1 / 1

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products