

TM TECHNOLOGIE
emergency & evacuation lighting

TM.ONTEC S



IP 44 IP 65 LED 1h/3h 850 °C

210 ÷ 250 V AC
50 / 60 Hz
186 ÷ 254 V DC
20 ÷ 57 V DC

0.7 m

EAC CNBOP-PIB

CE

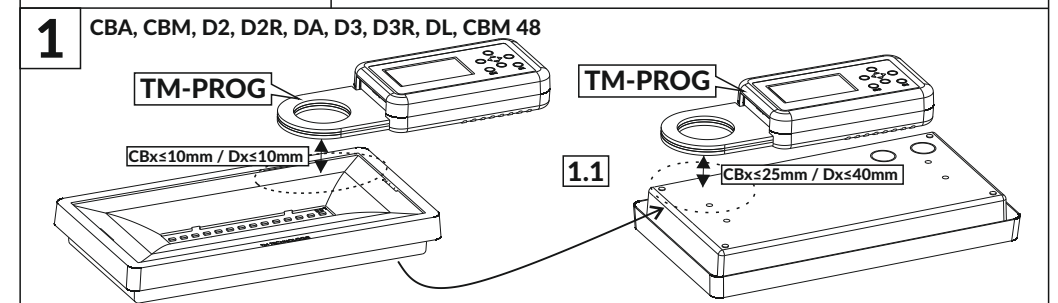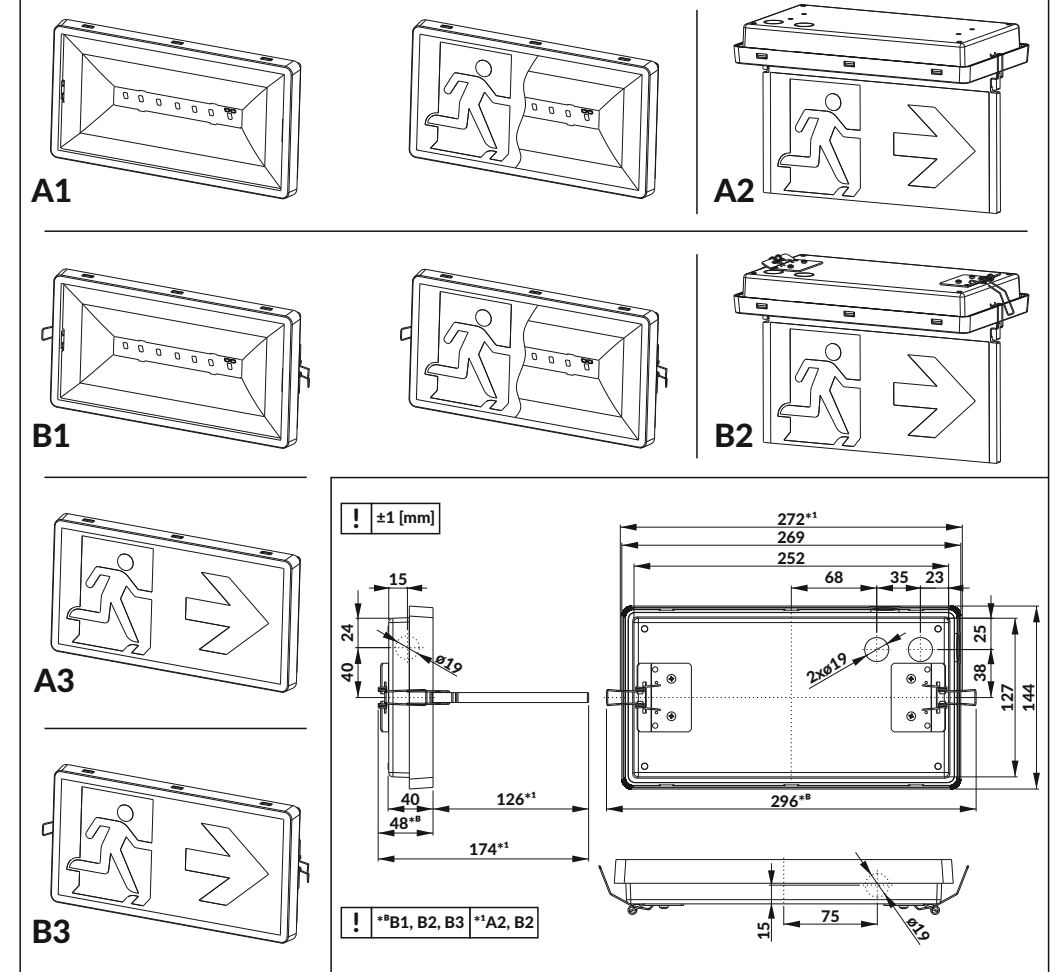

2 A1, A2, B1, B2
C1-C2
F1-F2
W1-W2

3 A1, A2, B1, B2
3.1a 1.3 → 1.4a → 1.5a

3.2* 3.3a 3.4a 3.5a 3.6a 1.12* → 1.13a → 1.14a

A3, B3
3.1c 1.3 → 1.4c → 1.5c → 3.2*

4 *ST/AT/DT/D2/D2R/DA/D3/D3R/DL
A1, A2, B1, B2
4.1a 1.3 → 1.4a → 1.5a
A3, A3
4.1c 1.3 → 1.4c → 1.5c

LiFePO4/C 3.2V 1.5-1.6Ah 4.2

Ni-Cd 3.6V 1.5Ah (2.5Ah) 4.2

LiFePO4/C 6.4V 1.5-1.6Ah (3.0-3.2Ah) (4.5-4.8Ah) 4.2

4.3 4.4 4.5 4.6

4.7a 1.12* → 1.13a → 1.14a A3, B3 4.7c 1.12* → 1.13c → 1.14c

ONTEC S	M	NM	CB	ONTEC S	M1	ONTEC S	CBA	ONTEC S	CBA	CB+, CBM
t. [°C]	90	77	97,5	t. [°C]	85	t. [°C]	97,5	t. [°C]	80°C	95°C

ONTEC S	6 LED	7 LED	14 LED	21 LED	ONTEC S	M1 24(48)V CB	ONTEC S	M(C)(W)(F)1U
t. [°C]	87	85	71	59	t. [°C]	85	t. [°C]	55

ONTEC S	1 LED	2 LED	ONTEC S	E1P (14 LED)	ONTEC S	CB 24/48, CBM 48
t. [°C]	85	95	t. [°C]	50	t. [°C]	110°C



