



TM.ONTEC C M1

60 NM ST



Catalog number	TM-OC.M1STN600W
Application	anti-panic lighting
Duration time	1 h
Operating mode	NM
Version	ST – for button test
Colour	RAL9003
Luminous flux	338 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.2 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	20÷57 V DC, 186÷254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
Appliance classes	2
IP	IP20
IK	IK03
Battery	LiFePO4/C (LN) 3.2V 1.5-1.6Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

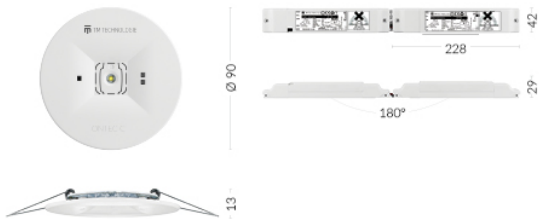

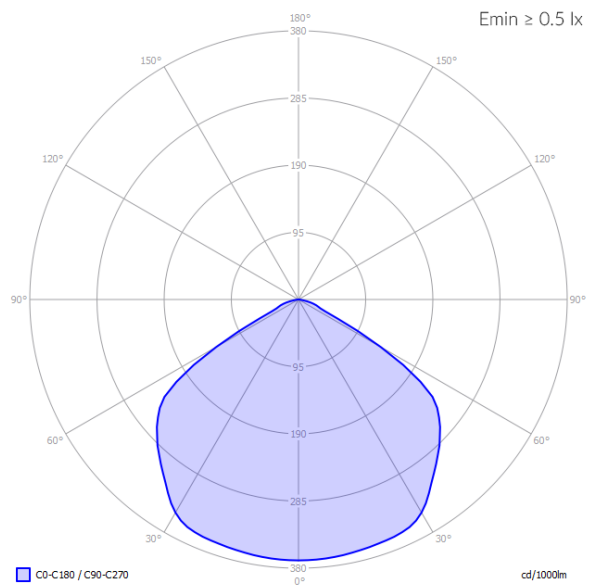

PHOTOMETRY [m]

Ceiling height		Distance wall - fitting
	CB	1h
2,5	3,5	3,5
3,0	4,0	4,0
4,0	5,0	5,0
5,0	5,5	5,5
6,0	5,5	5,5
7,0	6,0	6,0
8,0	6,0	6,0
9,0	5,5	5,5
10,0	5,0	5,0

