


Fényvetők
PANTH H1

FLICKER FREE 


Magas szintű vizuális komfort és részletmeghatározás, csökkentett stresszhatás.

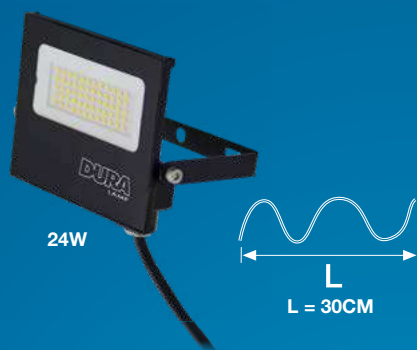

SZUPER-KOMPAKT,
MAGAS
HATÉKONYSÁG
AKÁR 30 000 LUMEN



SZENZOROS VERZIÓ:
A BIZTONSÁG ÉS
ENERGIATAKÁRÉKOSSÁG
ÉRDEKÉBEN

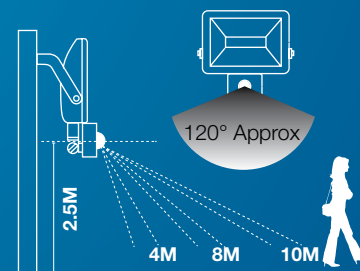

ÁLLÍTHATÓ KÖRNYEZETVILÁGÍTÁS



REAL LUMENS

A fényáram adatok VALÓSAK. Az értékeket a tényleges használati feltételek alapján mérik. A LED-forrás névleges értékei nincsenek megadva..



Fényvetők PANTH H1

Szuperkompakt professzionális projektorok nagy kereskedelmi és ipari terekhez; rendkívül hatékony SMD technológiát használ, akár 175lm/W.

JELLEMZŐK

Ultralapos, rendkívül hatékony, hosszú élettartamú megbízható termékek minden olyan területen, ahol nagy teljesítményű fénykibocsátás és jelentős energiamegtakarítás szükséges. Túlfeszültség-védelemmel felszerelt, lásd a részleteket. Ingyenes vezeték-velélemmel használható (30 cm hosszú 24 W-ig és 95 cm nagyobb teljesítményhez).

TELEPÍTÉS

Szabadon álló vagy a felülethez rögzítve a forgókonzzal.


ANYAG

Öntött alumínium test.

Magas IP besorolásának köszönhetően poros és párás környezetben is használható.

FÉNNYALÁB





Szimmetrikus sugárszög: 110°.



PANTH H1

	W	Im	CD	K		PF	L	L1	H			ART.
■	24	3900	1450	3000	110°	0.5	145	105	29	324	1 / 20	PAH1L04BLW
■	24	4200	1540	4000	110°	0.5	145	105	29	324	1 / 20	PAH1L04BLN
■	24	4100	1500	6000	110°	0.5	145	105	29	324	1 / 20	PAH1L04BLC
■	60	9900	3550	3000	110°	0.95	225	155	35	771	1 / 10	PAH1L10BLW
■	60	10500	3750	4000	110°	0.95	225	155	35	771	1 / 10	PAH1L10BLN
■	60	10200	3640	6000	110°	0.95	225	155	35	771	1 / 10	PAH1L10BLC
■	120	20000	7100	3000	110°	0.95	305	220	35	1608	1 / 10	PAH1L20BLW
■	120	20500	7520	4000	110°	0.95	305	220	35	1608	1 / 10	PAH1L20BLN
■	120	21000	7340	6000	110°	0.95	305	220	35	1608	1 / 10	PAH1L20BLC
■	165	28500	10000	3000	110°	0.95	355	260	36	2217	1 / 5	PAH1L30BLW
■	165	31000	11120	4000	110°	0.95	355	260	36	2217	1 / 5	PAH1L30BLN
■	165	30000	10840	6000	110°	0.95	355	260	36	2217	1 / 5	PAH1L30BLC

PANTH H1 - SENSOR

	W	Im	CD	K		PF	L	L1	H			ART.
□	15	2600	980	4000	110°	0.55	115	82	27	259	1 / 20	PAH1L03WHNS
■	15	2600	980	4000	110°	0.55	115	82	27	259	1 / 20	PAH1L03BLNS
□	40	7000	2570	4000	110°	0.95	190	125	29	572	1 / 10	PAH1L07WHNS
■	40	7000	2500	4000	110°	0.95	190	125	29	572	1 / 10	PAH1L07BLNS

Projectors

PANTH H2 CCT

FLICKER FREE 

Magas szintű vizuális komfort és részletmeghatározás, csökkentett stresszhatás.



200W



150W




100W

Angle indication

angle arrow

Flat head hex socket screw

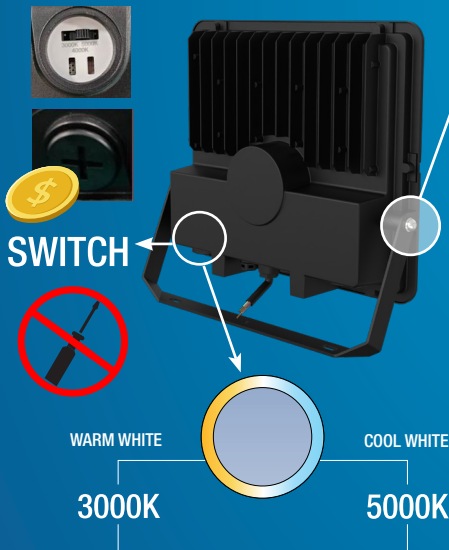

High power items are equipped with a GORE-TEX® valve to compensate for pressure variations due to thermal changes and to prevent the formation of condensation in the fixture.



POLE BRACKET



Download photometries
www.duralamp.com

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions. Nominal values of the LED source are not stated.

Projectors

PANTH H2 CCT

TPOLOGY

Super-compact professional projectors for large commercial and industrial spaces; uses highly efficient SMD technology, up to 140lm/W.

Very versatile thanks to the colour temperature selector switch: 3000K-5000K.

FEATURES

Ultra-flat, highly efficient, long service life: reliable products for use in all areas where powerful light output with significant energy savings is required.

Equipped with 4/6kV voltage surge protection.

Version with 6/6kV surcharge and provision for use in a centralised power supply system for emergency lighting available on request.

INSTALLATION

Free-standing or fixed to the surface with its swivelling bracket.

Available as accessories: reinforced bracket with tilt control and bracket for mounting on pole head or wall arm (diam. 60).


MATERIAL




Die-cast aluminium body.




Suitable for use in dusty and humid environments due to IP65 rating.

NOTES

The flux data indicated refers to the 4000K colour temperature.



PRO	220-240 Vac	Ra 80		50000 h L70B20	IP65	IK08	-15°C +35°C	 55°x65°	
------------	-------------	-------	---	----------------	------	------	----------------	--	---

	W	lm	CD	K		PF	L	L1	H			ART.
New	100	14000	10500	3000-5000	55°x65°	0,9	293	59	289	2200	1 / 4	PAH2L16CCT
New	150	21000	14600	3000-5000	55°x65°	0,9	325	59	345	3000	1 / 1	PAH2L24CCT
New	200	28000	19500	3000-5000	55°x65°	0,9	359	59	346	4000	1 / 1	PAH2L32CCT

SUPPORT FOR PANTH H2



New Support for PANTH H2
Support for mounting the luminaire on poles or wall arms.



1 / 10

ART.

KTPAH2-T

STREET LIGHT
URBAN 01

**FLICKER
FREE** 

Magas szintű vizuális komfort
és részletmeghatározás,
csökkentett stresszhatás.




150W



70W



30W

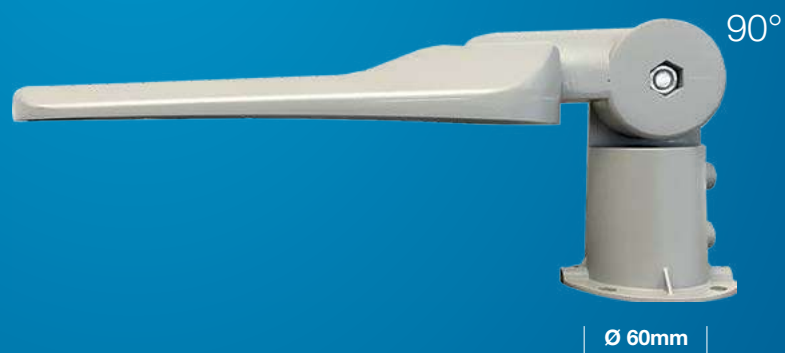

Download photometries
www.duralamp.com

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

STREET LIGHT

URBAN 01

TYOLOGY

Urban 01 street lights are the solution for residential lighting. Perfect for tree-lined avenues, gardens, car parks and outdoor residential and commercial areas. IP65.

FEATURES


With an efficiency of 160 lm/W, they offer an operating saving of 90% (without taking into account the reduced need for technical intervention) compared to older discharge lamp systems, pay for themselves in a short time and provide effective, long-lasting and flicker-free lighting.

INSTALLATION

Can be used on standard 60 mm poles and wall arms. Rotation joint up to 90 degrees. Equipped with 6kV overvoltage protection.

MATERIAL



Die-cast aluminium body with epoxy paint finish. Transparent polycarbonate screen with high light transmission and diffusion.



PRO	100-240 Vac	Ra 70		50000 h L70B20	IP65	IK06	-25°C +40°C	Risk Group 1		
------------	-------------	-------	---	----------------	------	------	----------------	--------------	---	---



URBAN 01 - S

New

W	lm	CD	K	PF	L	L1	H			ART.
30	4800	1500	4000	0.91	138	105	416	850	1 / 1	UR01L10740



URBAN 01 - M

New

W	lm	CD	K	PF	L	L1	H			ART.
70	11200	3700	4000	0.95	149	105	470	1020	1 / 1	UR01L20740

URBAN 01 - L

New

W	lm	CD	K	PF	L	L1	H			ART.
150	24000	7900	4000	0.95	203	105	633	1900	1 / 1	UR01L30740