

SEGNASENTIERO IP65 LUCE

Typology

Wall mounted surface pathway markers.

Features

Three light shielding versions for different lighting effects: full light, downwards and up&down.

Installation


Surface with the bracket supplied.

Material

Heat-resistant plastic body; opal polycarbonate screen.

Applications


Pathway marker.

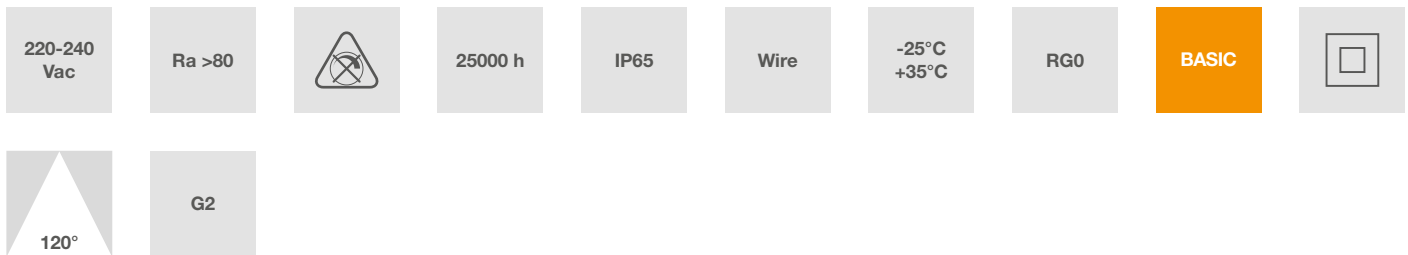

Characteristic data

Power	4 W	Beam	120°	Dimmable	No	Input	220-240 Vac
Base	Wire	IP	65	Flux	370 lm	PF	0,51
Tc	4000 K	Ra	>80	LED Warranty	G2	RG	RG0
Color	Black						

Dimensional characteristics



L	140 mm
L1	140 mm
H	51 mm

Lighting and photometric features

Beam opening	120°
Flux	370 lm
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	>80
Lifespan	25000 h
LED lifespan	L70B30
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

Electrical characteristics

Rated power	4 W
Input voltage	220-240 Vac
Frequency	50-60 Hz
Dimmable	No
Power factor (PF)	0,51
Input current	0.04 A
Weighted energy consumption	4 kWh/1000h
Number of cycles	100000
Operating temperature	-25°C / +35°C

Other Infotech

Reflector	Yes
-----------	-----

LED Warranty

G2	Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

Standards and Directives

2009/125/EC, 1194/2012, 2015/1428, 2010/30/EU	CEI EN 61000-3-3:2014
874/2012, 2011/65/EU, 2012/19/EU, 2014/30/EU	CEI EN 61547:2010
2014/35/EU, 2015/863	CEI EN 62031:2009
CEI EN 55015:2020	CEI EN 62031/A1/A2:2015
CEI EN 60598-1:2015	CEI EN 62471:2010
CEI EN 60598-1/A1:2019	IEC TR 62471-2:2009
CEI EN 60598-2-1:1997	CEI EN 62493:2015
CEI EN 61000-3-2:2019	CEI 34-141:2014

Logistics data

Item net weight	250 gr
Barcode single item	8011905927455
Number of pieces multiple pack	50
Barcode multiple pack	8011905932503
Minimum order quantity	1

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products