

Delta LED PANEL LIGHTS



40W-4000LM

Features:

1. Sides edge-lit
2. Luminaire efficiency up to 100 lm/w; Led Module efficiency 130lm/w
3. CRI >80, ErP compatible
4. Ultra slim design 10mm thickness
5. Easy and various installation styles
6. Lighting sensors and Motion sensors are optional
7. 5 years warranty with PMMA LGP



IP40

DELTA LED PANEL LIGHTS

Overview

HUNILUX Ultra Slim LED Panel Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with has everlasting color.



Color Optional

White, Silver or other RAL colors available on request.

LED SOURCE

4014LED




LED DRIVER

External drive optional, According with LVD, EMC standard,
5 years warranty with PMMA LGP

Luminaire Body



High quality aviation aluminum, durable not deformed
Integrated design, excellent thermal performance
Ultra-thin design, high space utilization

Average beam angle(50%): 120°
Power: 35W 595X595 PMMA

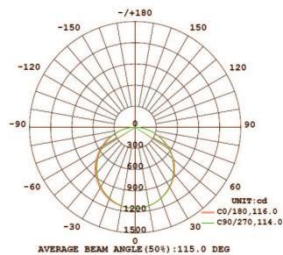


Beam Angle: 120°

Application: Office & Administrative Lighting

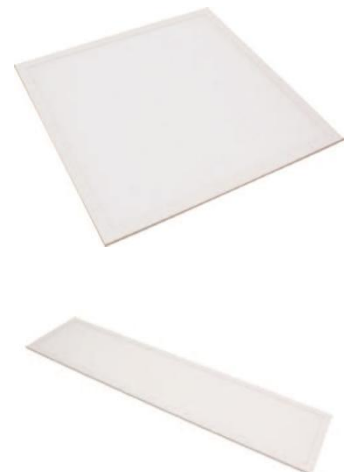


Box Surface Mounted

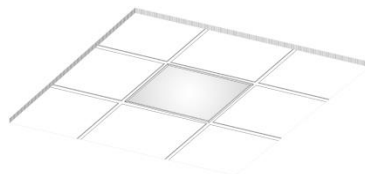

Recessed

Features	Data
Norminal Wattage	40W
Dimension (mm)	595*595*10
Weights	2.26kgs
Input Voltage AC	220-240 V/AC
LED Type	4014
Fuction	ON/OFF
Driver Brand	MEANF
Operating Temperature	-20 to +40°C (Amb.)
Power Factor (PF)	>0.95
THD	<15%
Lumen Output (+/-5%)	4000lm
Luminarie efficiency (+/-5%)	100lm/w
LED Module efficiency(+/-5%)	130lm/w
Beam Angle	120°
Ra	Ra>80
CCT	4000K
Rating	IP40 IK05
Material	Aluminium+PMMA
Installation	Box Surface Mounted/ Recessed
Shell Color	White/Sliver or Others Upon Request
Certifications	CCC DLC ENEC CE ROHS ISO9001
Packaging Type	Carton box

DIMENSION DATA

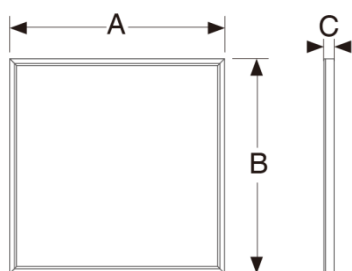

Power	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
40W	595	595	10

ORDERING INFORMATION

Part Number	Power	CCT	Lumen Output	LGP	Beam	Dimension(mm)
HL0017565	40W	4000K	4000 lm	PMMA	120°	595*595*10

PACKAGING DATA

Part Number	Pcs./Inner Box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
HL0017565	2	L620*W660*H210	10	2560	5120

Application

Offices, Restaurants, Hotels, Shops, School, Hospital, Hallway,lobbies, Meeting Rooms



HUNILUX Kereskedelmi és Gyártó Kft.

Headquarters:1117 Budapest, Hunyadi János út 16.

www.hunilux.hu