



URBAN 01 - M

Typology

Urban 01 street lights are the solution for residential lighting. Perfect for tree-lined avenues, gardens, car parks and outdoor residential and commercial areas. IP65.

Features

With an efficiency of 160 lm/W, they offer an operating saving of 90% (without taking into account the reduced need for technical intervention) compared to older discharge lamp systems, pay for themselves in a short time and provide effective, long-lasting and flicker-free lighting.

Installation

Can be used on standard 60 mm poles and wall arms. Rotation joint up to 90 degrees. Equipped with 6kV overvoltage protection required for use in public environments.

Material


Die-cast aluminium body with epoxy paint finish. Transparent polycarbonate screen with high light transmission and diffusion.



Characteristic data

Power	70 W	Dimmable	No	Input	100-240 Vac	Base	Free Wire
IP	65	Flux	11200 lm	PF	0.95	Tc	4000 K
Ra	70	LED Warranty	G5	Axis	3700 cd	IK	IK06
RG	RG1						

Dimensional characteristics



L	149 mm
L1	105 mm
H	470 mm


Lighting and photometric features

Flux	11200 lm
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	70
Lifespan	50000 h
LED lifespan	L70B20

Electrical characteristics

Rated power	70 W
Input voltage	100-240 Vac
Frequency	50-60 Hz
Dimmable	No
Power factor (PF)	0.95
Weighted energy consumption	70 kWh/1000h
Operating temperature	-25°C / +40°C

Photometry





	4000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra70			147°	66°	
Fixture Power	70W	1	6.81	1.81	2575
Source Flux	11200lm	2	13.61	3.62	644
Fixture Flux	11200lm	3	20.42	5.44	286
Efficacy	160lm/W	4	27.23	7.25	161
Imax=333cd/klm	Imax	5	34.04	9.06	103

EuLumDat file on the site

Other Infotech

Flicker Free	Yes
Light source replaceability	Replaceable (LED only) light source by a professional.
Control gear replaceability	Replaceable control gear by a professional.

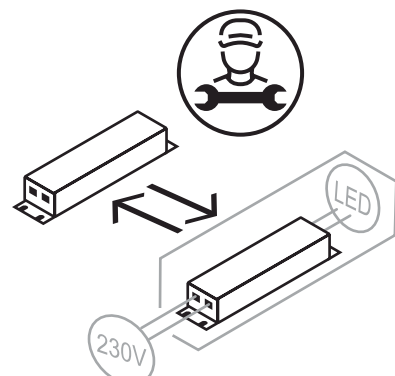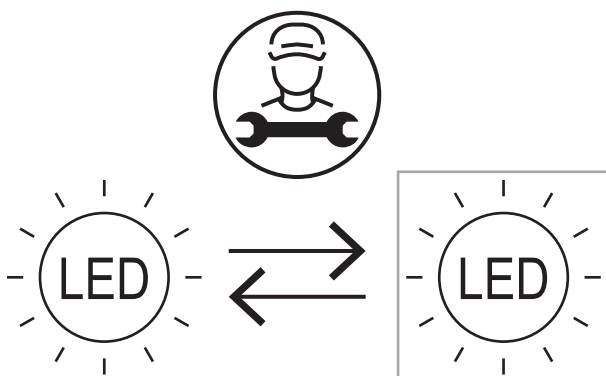

LED Warranty

G5	undefined
----	-----------

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC
 2014/35/EU * LVD
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 60598-1:2022
 CEI EN 60598-2-5:2016
 CEI EN 61000-3-2:2019 (+A1:2021)
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
 CEI EN 61547:2010
 CEI EN 62031:2021 (+A11:2022)
 CEI EN 62471:2010
 IEC/TR 62471-2:2009
 CEI EN 62493:2015
 CEI 34-141:2014

Logistics data

Item net weight	1020 gr
Barcode single item	8011905331320
Minimum order quantity	1
Minimum packaging	1 / 1