


BACKLIGHT MICROPRISMA 595


LED INSIDE LIGHTS / LED VSTAVÁNÉ SVIETIDLA

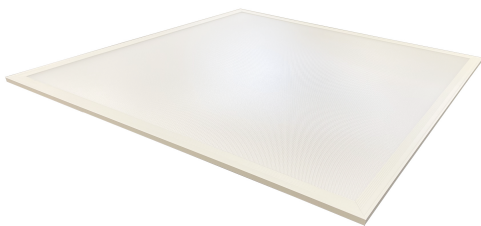


Specifications / Špecifikácia

Model	BACKLIGHT MICROPRISMA 595
Power / Výkon	45 W
Luminous Flux/Svetelný tok	6000 lm
Color temperature / farba	3000K / 4000K
Electrical class / el. tried	II
UGR	19
Color Rendering Index (CRI)	Ra 90
Beam angle Uhol vyžarovania	90°
Input Voltage Napájanie	200-240VAC
Power Factor	>0.90
Frequency	50 / 60 Hz
Operating Temperature Pracovná teplota	45°C
Driver Type / Typ napájača	Constant Current (CC) , FIX driver
Product Dimension (mm) Rozmer svietidla (mm)	A x B x C 595x595x33
Luminaire Net Weight Hmotnosť svietidla	1.8kg
Material	Housing / teleso Aluminum Alloy / hliníková zliatina
	Diffuser / difuzor PMMA / Polymetylmetakrylát/ MICROPRISMA
Fixture Color / Farba svietidla	White / Biela
IP Rating / Krytie IP	IP44
Life Time / životnosť	>50,000H (Ta=30°L80B10)
Warranty / záruka	5 Years/rokov

Dimensions / Rozmery

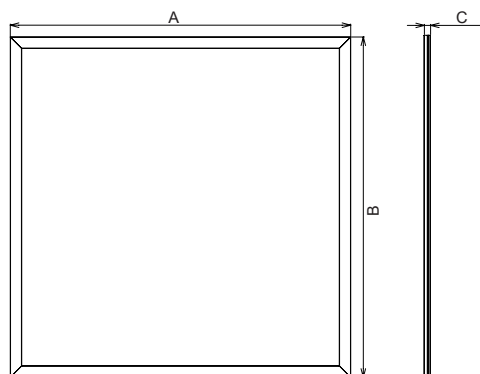

Photometry

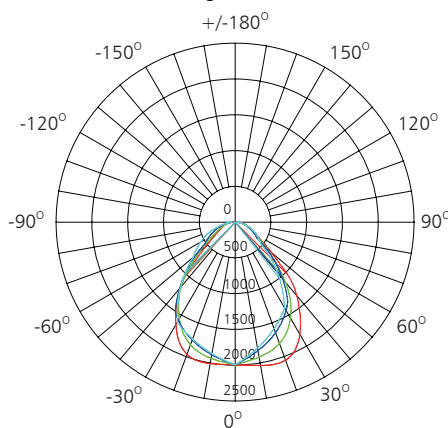

UNIT: cd

- C0/180, 103.8 deg
- C30/210, 101.1 deg
- C60/240, 101.2 deg
- C90/270, 102.1 deg

AVERAGE BEAM ANGLE (50%): 101.3DEG