




CODE

EAN

107014


FUTURA 2.4ft ABS 8800/840 RED

8596328070143

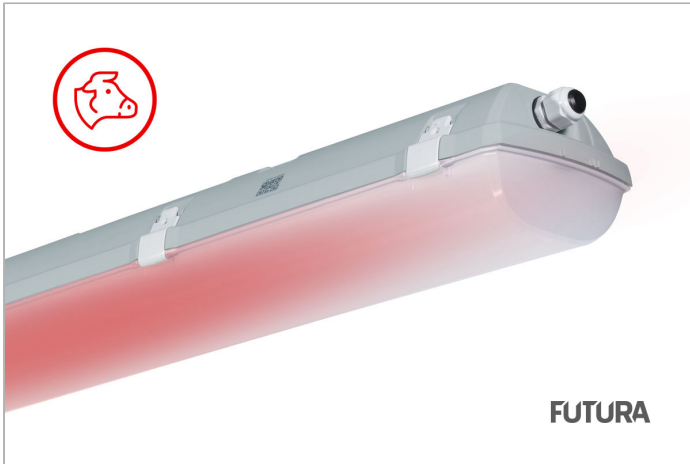

- Degree of protection: IP66
- Ambient temperature: -25–45 °C
- Impact strength: IK06
- Life time: 50000 hours
- System efficacy: 150 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 25
- Max. number of luminaires per circuit breaker C16: 38
- Flickering value Pst LM: 0,043
- Power factor: 0,95
- Stroboscope effect value SVM: 0,004
- Total harmonic distortion: 10
- Energy efficiency class of the light source: C

- Body: Dark grey ABS (high chemical resistance, UV stability, RAL 7001)
- Diffuser: Translucent acrylic (AC), UV stable, chemically resistant
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Polyamide + 15 % fibreglass
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless five-pole terminal block
- Resistant to humidity and dust, with IP66 enclosure rating
- Optimal mounting height: 3.5 to 10 m
- ON/OFF electronic driver (AC, DC on demand), RED modul 600lm/12W

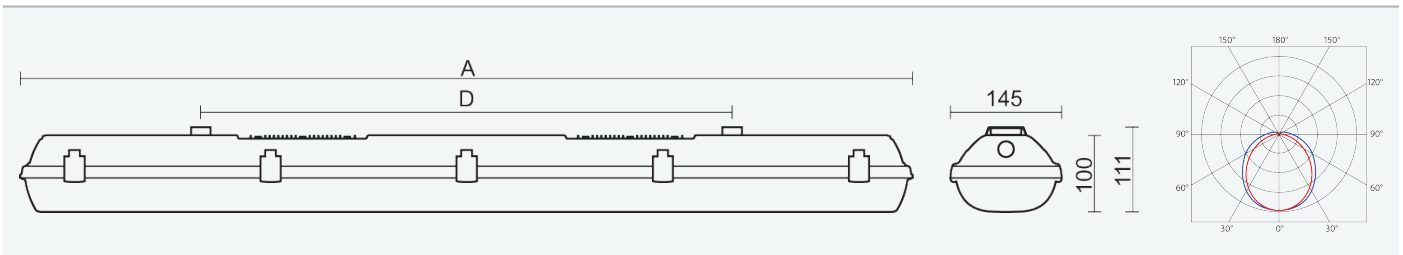

Code	Type	Ta Max.: [°C]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]
107014	FUTURA 2.4ft ABS 8800/840 RED	45	7900	52,8	150	2,4	1172

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

