




**107015**


**FUTURA 2.5ft ABS 11000/840 RED**

**8596328070150**

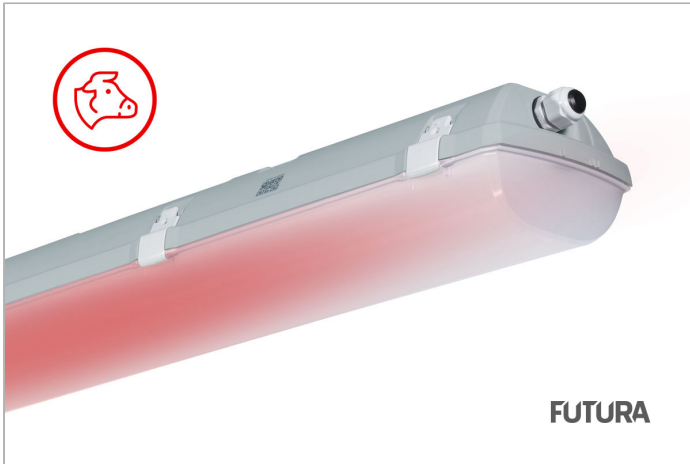

- Degree of protection: IP66
- Ambient temperature: -25–45 °C
- Impact strength: IK06
- Life time: 50000 hours
- System efficacy: 153 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 19
- Max. number of luminaires per circuit breaker C16: 30
- Energy efficiency class of the light source: C

- Body: Dark grey ABS (high chemical resistance, UV stability, RAL 7001)
- Diffuser: Translucent acrylic (AC), UV stable, chemically resistant
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Polyamide + 15 % fibreglass
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless five-pole terminal block
- Resistant to humidity and dust, with IP66 enclosure rating
- Optimal mounting height: 3.5 to 10 m
- ON/OFF electronic driver (AC, DC on demand), RED modul 600lm/12W

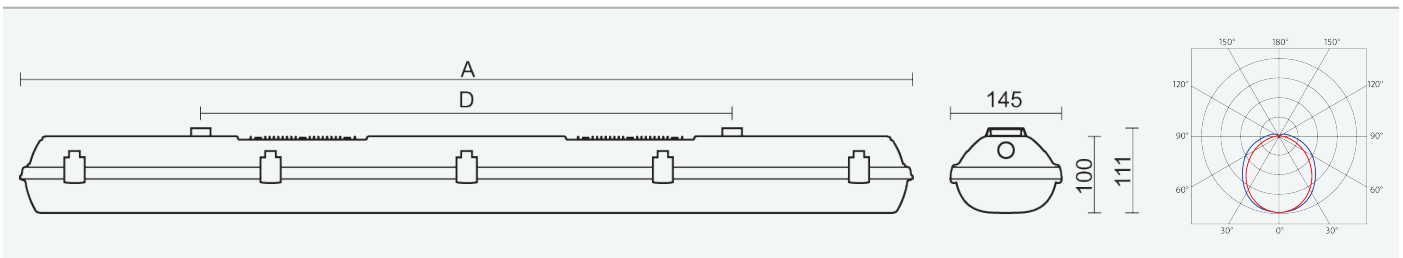

Code	Type	Ta Max.: [°C]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]
107015	FUTURA 2.5ft ABS 11000/840 RED	45	9910	64,7	153	3,0	1452

The values stated for power consumption and luminous flux are in a tolerance of  $\pm 7.5\%$

FEATURES



CERTIFICATION



DOWNLOAD

